



WHITE PAPER

TRIMIT External API 23.2

This document contains information about the External API functionality in TRIMIT 23.2 for Microsoft Dynamics 365 Business Central 2023, Wave 2 (W1).

Version: 23.2
Date: 17-01-2024

CONTENTS

Introduction.....	1
Components	2
Integration Setup.....	6
FastTab General	6
FastTab Products.....	7
FastTab Inventory.....	8
FastTab Customers.....	9
FastTab Sales Prices	9
FastTab Sales Documents.....	10
FastTab Posted Sales Documents.....	17
Actions, Products	17
Edit Category Lines	17
Category Management.....	17
Refresh Products	18
Category List	18
Actions, Documents	18
Create Sales Posting Job Queue Job	18
Sales Documents	19
Posted Sales Documents	20
Related	21
Language Setup	21
Currency Setup	21
Location Setup	22
Customer Setup	23
Customer Template Setup.....	23
Item Setup	24
Table Data Setup	24
TRIMIT's Postman.json	25
Appendix 1: Codeunit 6036860	26
ExportProductList()	26
ExportProductList()	26
ExportProductList()	27

ExportProduct()	27
ExportProduct()	27
ExportProduct()	28
ExportProduct()	28
ExportProduct()	28
TrackExportedProducts()	29
TrackExportedProduct()	29
TrackExportedProduct()	29
GetCategories()	30
ExportInventories()	30
ExportInventories()	30
ExportInventories()	30
ExportInventoryProduct()	31
ExportInventoryProduct()	31
ExportInventoryProduct()	31
ExportItemInventories()	32
ExportItemInventories()	32
ExportPrices()	32
ExportPrices()	32
ExportPrices()	33
ExportPricesProduct()	33
ExportCustomers()	33
ExportCustomers()	34
ExportCustomers()	34
ExportCustomer()	34
ExportCustomer()	34
ImportSalesOrders()	35
ImportSalesOrders()	35
ImportSalesOrders()	35
ImportSalesInvoices()	36
ImportSalesInvoices()	36
ImportSalesInvoices()	36
ImportSalesReturnOrders()	36

ImportSalesReturnOrders()	37
ImportSalesReturnOrders()	37
ImportSalesCreditMemos()	37
ImportSalesCreditMemos()	37
ImportSalesCreditMemos()	38
ClearTempSalesDocuments()	38
ClearTempPostedSalesDocuments()	38
ExportSalesShipments()	38
ExportSalesShipments()	39
ExportSalesShipments()	39
ExportSalesShipments()	39
ExportSalesInvoices()	40
ExportSalesInvoices()	40
ExportSalesInvoices()	40
ExportSalesInvoices()	40
ExportSalesReturnReceipts()	41
ExportSalesReturnReceipts()	41
ExportSalesReturnReceipts()	41
ExportSalesReturnReceipts()	42
ExportSalesCreditMemos()	42
ExportSalesCreditMemos()	42
ExportSalesCreditMemos()	42
ExportSalesCreditMemos()	43
GetDefaultLocationCode()	43
GetLocationCodeWithCheck()	43
GetProductDescriptions()	44
GetProductDescriptions()	44
GetProductDimensions()	44
GetProductDimensions()	44
GetProductStatisticsGroups()	45
GetProductStatisticsGroups()	45
GetProductVarDims()	45
GetProductVarDims()	45

GetProductCompositions()	46
GetProductCompositions()	46
GetProductCarelables()	46
GetProductCarelables()	47
GetProductAdditionalInfo()	47
GetProductAdditionalInfo()	47
GetProductAdditionalTags()	47
GetProductAdditionalTags()	48
GetProductSustainability()	48
GetProductSustainability()	48
GetProductMeasurementCharts()	48
GetProductMeasurementCharts()	49
GetProductCollections()	49
GetProductCollections()	49
GetProductPrices()	49
GetProductPrices()	50
GetProductItems()	50
GetProductItems()	50
GetProductItemAttributes()	50
GetProductItemAttributes()	51
GetProductImages()	51
GetProductImages()	51
GetTableData()	51
GetIntegrationProductFromFilter()	52
GetIntegrationProductFromFilter()	52
CopyIntegrationProduct()	52
CheckProductExportAllowed()	52
CheckCustomerExportAllowed()	53
CheckSalesQuoteImportAllowed()	53
CheckSalesOrderImportAllowed()	53
CheckSalesInvoiceImportAllowed()	53
CheckSalesCreditMemoImportAllowed()	53
CheckSalesReturnOrderImportAllowed()	53

CheckPostedSalesShipmentExportAllowed()	53
CheckPostedSalesInvoiceExportAllowed()	54
CheckPostedSalesReturnShipmentExportAllowed()	54
GetCode10FromText20()	54
GetCode10FromCode20()	54
GetCode10FromCode40()	55
GetCode20FromCode30()	55
GetCode20FromCode35()	55
FindIntegrationSetupCode()	55
SetIntegrationSetup()	56
pf_OnAfterIsSaleAllowedCheck()	56
pf_OnAfterGenerateProductList()	56
pf_OnAfterGetProductList()	57
pf_OnAfterGetProductDetails()	57
pf_OnAfterGetExtendedDescription()	57
pf_OnAfterGetDescription()	57
pf_OnAfterGetPrice()	58
pf_OnAfterGetEAN()	58
pf_OnAfterGetGTIN()	58
pf_OnAfterGetInventories()	58
pf_OnAfterGetInventory()	59
pf_OnAfterGetItemInventories()	59
pf_OnAfterCalculateInventory()	59
Appendix 2: Codeunit 6036862	60
ProcessDocumentWithSetup()	60
ReverseDocumentWithCheck()	60
ReverseDocument()	61
ReverseDocumentLines()	61
ProcessDocument()	61
ProcessDocument()	62
ProcessDocument()	62
ProcessDocument()	62
ProcessDocument()	62

CreateDocument()	63
SetDocumentNoAndSeries()	63
CreateJournal()	63
CreateDocJournal()	63
ReleaseDocument()	64
CreatePickDocFromOrder()	64
CreateOrderFromQuote()	64
CreateInvoiceFromQuote()	64
CreatePayment()	65
PostDocument()	65
PostDocumentJournal()	65
PostDocWithJournal()	65
SetInvoiceExportedStatus()	65
SetSalesInvoiceExportedStatus()	66
SetCreditMemoExportedStatus()	66
SetSalesCreditMemoExportedStatus()	66
SetShipmentExportedStatus()	66
SetSalesShipmentExportedStatus()	67
SetReturnReceiptExportedStatus()	67
SetSalesReturnReceiptExportedStatus()	67
IsDocumentNoUsed()	68
IsDocumentCreated()	68
HasSellToInfo()	68
HasBillToInfo()	68
HasShipToInfo()	69
CreateOrderExtraInfo()	69
CreateOrderExtraInfo()	69
GetIntegrationItemWithCheck()	69
GetIntegrationItem()	70
GetShipments()	70
GetShipments()	71
GetInvoices()	71
GetInvoices()	71

GetReturnReceipts()	72
GetReturnReceipts()	72
GetCreditMemos()	72
GetCreditMemos()	72
GetCustomerNo()	73
GetCustomerNoFromSetup()	73
GetCustomerNoFromTemplateSetup()	73
CreateCustomerFromTemplate()	73
CreateIntegrationParams()	74
ImportSalesDocuments()	74
SetIntegrationSetup()	74
Pf_OnAfterImportSalesDocuments()	75
OnAfterGetShipment()	75
Pf_OnAfterGetInvoice()	75
Pf_OnAfterGetReturnReceipt()	75
Pf_OnAfterGetCreditMemo()	76
Pf_OnGetCustomerNo()	76
Pf_OnAfterGetCustNoFromSetup()	76
Pf_OnAfterCreateDocument()	77
Pf_OnAfterCreateOrderFromQuote()	77
Pf_OnAfterCreateInvoiceFromQuote()	77
Pf_OnAfterCreatePick()	77
Pf_OnAfterAutoRelease()	77
Pf_OnAfterManualRelease()	78
Pf_OnBeforeReverseDocument()	78
Pf_OnAfterReverseDocument()	78
Pf_OnBeforeCreateCustomer()	79
Pf_OnAfterCreateCustomer()	79

INTRODUCTION

The **TRIMIT External API** (Application Programming Interface) is an extension on Microsoft's API and enables you to

- Export Master/Item Data
- Export Sales Prices
- Export Inventory/Availability
- Export Customer Data
- Import Sales Documents
- Export Posted Sales Invoices and Posted Credit Memos

This will allow third parties to create customized apps on top of this framework, which can be used for the integration of external systems from and to TRIMIT.

The Integration module, which consist of the **Integration Setup**, and related data, is found in the TRIMIT ERP, and APIs (codeunits) are available for exporting Master/Item data, exporting Inventory/Available Quantities of Items, and for importing Sales Documents and processing them within TRIMIT ERP, thus creating ordinary Sales Documents, Release them and even Post them if required.

Furthermore, exporting Posted Sales Documents is also available in the framework.

The objects are all in our **TRIMIT** App, which will give you the possibility to use OData APIs as an extension of the standard Microsoft APIs.

(See [API\(V2.0\) for Dynamics 365 Business Central - Business Central | Microsoft Learn](#) for more info)

As off this release, we can also give you a Postman collection (see [Postman API Platform | Sign Up for Free](#) for more info) that can be used as example to create your own Postman collection.

You can acquire this Postman collection via partnersupport@trimit.com.

In this White Paper, we also added the detailed documentation that you can find in the AL Code of the main two Codeunits that are used for our External API functionality:

[Appendix 1: Codeunit 6036860](#) and [Appendix 2: Codeunit 6036862](#).

The audience for this document is the Consultant or very skilled User.

It will only describe the TRIMIT fields/functionality and not the standard Business Central fields/functionality.

Be aware of not changing settings and parameters in a live database without consulting the implementing partner.

The functionality described is the functionality as of **TRIMIT 23.2 for Business Central W1 BC23.X**.

The pictures in this White Paper are based on the demo database for **TRIMIT 23.2**, which is based on Microsoft Dynamics 365 Business Central 2023 Release Wave 2, in the demo company **CRONUS TRIMIT W1 Ltd.** (based on CRONUS International Ltd. of Microsoft Dynamics 365 Business Central).

COMPONENTS

TRIMIT External API contains the following objects:

The Table	6036835	<i>trm Temp Integration Product</i>
	6036836	<i>trm Temp Integration Inventory</i>
	6036837	<i>trm Temp Integration SaleTrack</i>
	6036838	<i>trm Temp Integration Data</i>
	6036840	<i>trm Integration Setup</i>
	6036841	<i>trm Integration Setup Line</i>
	6036842	<i>trm Integration Exp. Product</i>
	6036843	<i>trm Integration Exp. Document</i>
The Pages	6036870	<i>trm Integration Setup List</i>
	6036871	<i>trm Integration Setup</i>
	6036872	<i>trm Integration Customer Setup</i>
	6036873	<i>trm Integration Currency Setup</i>
	6036874	<i>trm Integration Language Setup</i>
	6036875	<i>trm Integration Location Setup</i>
	6036876	<i>trm Integration Item Setup</i>
	6036877	<i>trm Integration Cust. Template</i>
	6036879	<i>trm Integration Table Setup</i>
	6036881	<i>trm Integration Sales Docs</i>
The API Pages	6036882	<i>trm Integration Sales Document</i>
	6036883	<i>trm Integration Sales Doc Sub</i>
	6037801	<i>trm EAPI Attachments</i>
	6037802	<i>trm EAPI Campaigns</i>
	6037803	<i>trm EAPI Categories</i>
	6037804	<i>trm EAPI Configured Fields</i>
	6037805	<i>trm EAPI Customer Price Groups</i>
	6037806	<i>trm EAPI Default Dimensions</i>
	6037807	<i>trm EAPI Dim.Set Lines</i>
	6037808	<i>trm EAPI Item Attributes</i>
	6037809	<i>trm EAPI Locations</i>
	6037810	<i>trm EAPI PDF Document</i>
	6037811	<i>trm EAPI Pictures</i>
	6037812	<i>trm EAPI Price Group Params</i>
	6037813	<i>trm EAPI Salespersons</i>
	6037814	<i>trm EAPI Units Of Measure</i>
	6037815	<i>trm EAPI Collections</i>
	6037816	<i>trm EAPI Delivery Periods</i>
	6037817	<i>trm EAPI Contacts</i>
	6037818	<i>trm EAPI Contacts Info</i>
	6037819	<i>trm EAPI Cust Finance Dtls</i>

The API Pages	6037820 trm EAPI Customers
	6037821 trm EAPI Return Order Lines
	6037822 trm EAPI Return Orders
	6037823 trm EAPI Sales Credit Memos
	6037824 trm EAPI Sales Cr.Memo Lines
	6037825 trm EAPI Sales Document Lines
	6037826 trm EAPI Sales Document
	6037827 trm EAPI Sales Invoice Lines
	6037828 trm EAPI Sales Invoices
	6037829 trm EAPI Sales Order Lines
	6037830 trm EAPI Sales Orders
	6037831 trm EAPI Sales Quote Lines
	6037832 trm EAPI Sales Quotes
	6037833 trm EAPI Inventories
	6037834 trm EAPI Item Additional Info
	6037835 trm EAPI Item Additional Tags
	6037836 trm EAPI Item Attribute
	6037837 trm EAPI Item Carelabel
	6037838 trm EAPI Item Composition
	6037839 trm EAPI Item Description
	6037840 trm EAPI Item Inventory
	6037841 trm EAPI Item Price
	6037842 trm EAPI Items
	6037843 trm EAPI Item Stat. Group
	6037844 trm EAPI Item Sustainability
	6037845 trm EAPI Master Add. Info
	6037846 trm EAPI Master Add. Tags
	6037847 trm EAPI Master Attributes
	6037848 trm EAPI Master Carelabel
	6037849 trm EAPI Master Collection
	6037850 trm EAPI Master Composition
	6037851 trm EAPI Master Description
	6037852 trm EAPI Master Dimension
	6037853 trm EAPI Master Inventories
	6037854 trm EAPI Master Item
	6037855 trm EAPI Master Measure Chart
	6037856 trm EAPI Master Price
	6037857 trm EAPI Masters
	6037858 trm EAPI Master Stat. Group
	6037859 trm EAPI Master Sustainability
	6037860 trm EAPI Master VarDim
	6037861 trm EAPI Exported Documents
	6037862 trm EAPI SalesPostCreditMemos
	6037863 trm EAPI SalesPostCrMemoLines

The API Pages	6037864	<i>trm EAPI SalesPostDocLines</i>
	6037865	<i>trm EAPI SalesPostDocuments</i>
	6037866	<i>trm EAPI SalesPostInvLines</i>
	6037867	<i>trm EAPI SalesPostInvoices</i>
	6037868	<i>trm EAPI SalesPostRetRcptLines</i>
	6037869	<i>trm EAPI SalesPostReturnRcpts</i>
	6037870	<i>trm EAPI SalesPostShipLines</i>
	6037871	<i>trm EAPI SalesPostShipments</i>
	6037872	<i>trm EAPI Sales Tracking</i>
	6037873	<i>trm EAPI Product Add. Info</i>
	6037874	<i>trm EAPI Product Add. Tags</i>
	6037875	<i>trm EAPI Product Attributes</i>
	6037876	<i>trm EAPI Product Carelabel</i>
	6037877	<i>trm EAPI Product Collection</i>
	6037878	<i>trm EAPI Product Composition</i>
	6037879	<i>trm EAPI Product Description</i>
	6037880	<i>trm EAPI Product Dimension</i>
	6037881	<i>trm EAPI Product Item</i>
	6037882	<i>trm EAPI Product Measure Chart</i>
	6037883	<i>trm EAPI Product Price</i>
	6037884	<i>trm EAPI Products</i>
	6037885	<i>trm EAPI Product Stat. Group</i>
	6037886	<i>trm EAPI Product Sust.ability</i>
	6037887	<i>trm EAPI Product VarDim</i>
	6037888	<i>trm EAPI VarDim Types</i>
	6037889	<i>trm EAPI VarDim Options</i>
	6037890	<i>trm EAPI Item Images</i>
	6037892	<i>trm EAPI Master Images</i>
	6037894	<i>trm EAPI Product Images</i>

The Codeunits	6036860	<i>trm Integration Handling</i>
	6036862	<i>trm Integration Sales Handling</i>
	6036863	<i>trm Integration Handling Impl.</i>
	6036864	<i>trm Integration Proc. SalesDoc</i>
	6036865	<i>trm Integration Post SalesDoc</i>
	6036866	<i>trm Integration Jnl Posting</i>
	6036870	<i>trm Integration Data Container</i>
	6036872	<i>trm Integration Agent</i>

The Enum


- 6036840 trm Integration Type** Implementation: Codeunit **trm Integration Agent**
- 6036841 trm Integration Data Type**
- 6036842 trm Integration Setup Line 1**
- 6036843 trm Integration Setup Line 2**
- 6036844 trm Integration Setup LineType**
- 6036845 trm Integration Cust. Handling**
- 6036846 trm Integration Product Type**
- 6036847 trm Integration Sales Doc Type**

NOTE

In the **TRIMIT** App, you can also see objects, that start with *trm API*, but they are part of the Integration between TRIMIT ERP and TRIMIT Portals.


INTEGRATION SETUP

For the “export/import” of data based on the **TRIMIT External API**, you need to fill the **Integration Setup**. You can find it via **Search Integration Setup**.

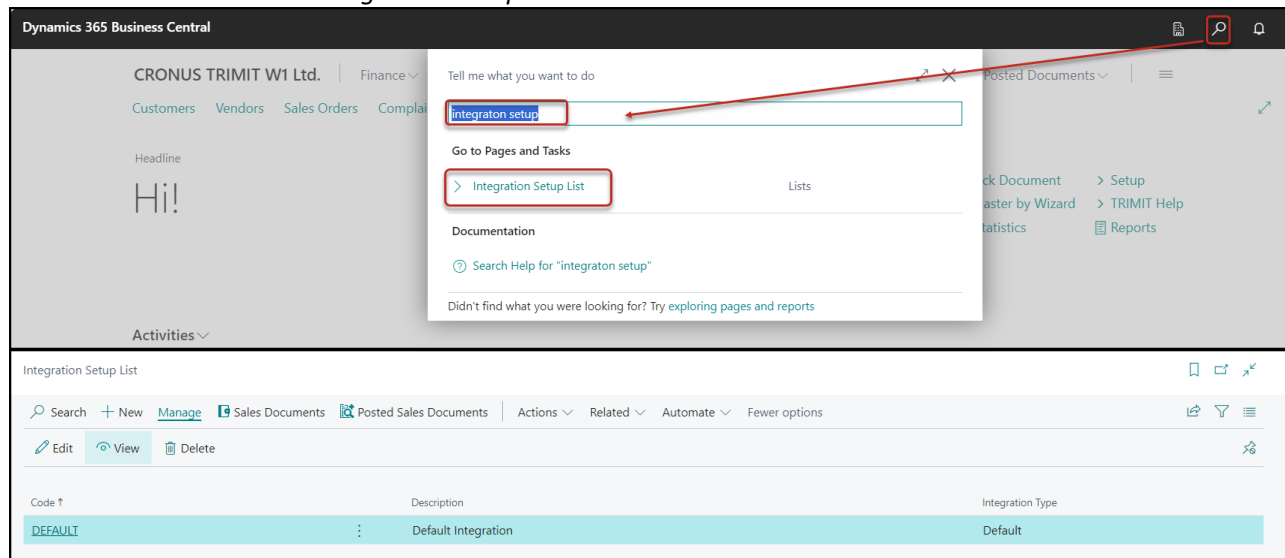

By clicking on the **Code**, you can open the Card or click **+ New** to create a new Setup.

FASTTAB GENERAL

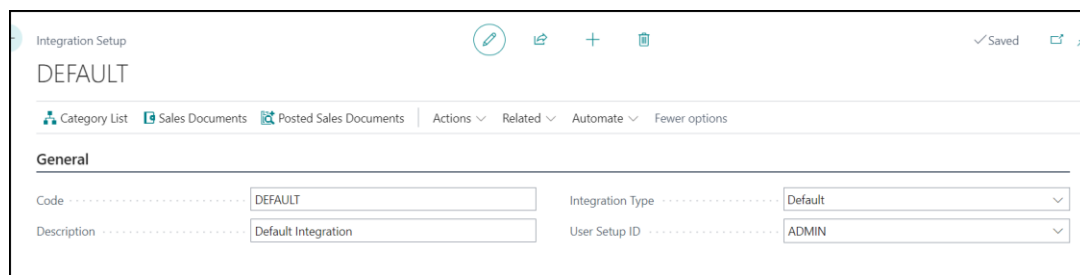

The screenshot shows the 'Integration Setup' card in Dynamics 365 Business Central. The 'General' tab is selected, and the following fields are visible:

Field	Value
Code	DEFAULT
Integration Type	Default
Description	Default Integration
User Setup ID	ADMIN

CODE

The unique Code for this Integration Setup.

You are able to create several Codes, but you need to realize, that the **User Setup ID** must comply with the **Username** that is used in the Authorization of your Postman collection or system that integrates with TRIMIT.

DESCRIPTION

Description for this specific **Code**.

INTEGRATION TYPE

At this point, we only have the option *Default*.


The **Integration Type** can be extended (it is an extendable enum) by implementing the interface “trm Integration Agent”.

Our *Default* implementation can be found in the Codeunit **6036872 trm Integration Agent**.

USER SETUP ID

Here you need to enter a **User ID** from the **User Setup**.

This **User Setup ID** must be the same as the **Username** that is used in the Authorization of your Postman collection, that allows you to exchange data by using the TRIMIT External API.

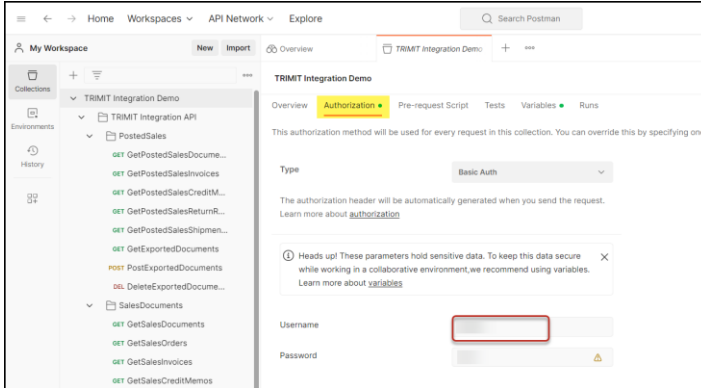

If you do not use Postman, you need to make sure that the **User Setup ID** is the same as the Username/Login of the system that allows you to export/import Data from/to TRIMIT.

FASTTAB PRODUCTS

Products	
Allow Product Export	☒
Category Structure	B2B_W_TOPS
Use Flat Item Only	☐
Log Exported Products	☒

ALLOW PRODUCT EXPORT

Is it allowed to export Product Data based on the Masters/Items that are in the **Category Structure**.

To be able to filter the export of Item/Master data, we created this special **Product Export**, which will be based on the **Category Structure** and the **Use Flat Item Only**.

NOTE

It will always be possible to export all the all the Items and Masters via the TRIMIT API services, which is an extension of the BC standard APIs with TRIMIT fields.

And of course, you will be able to set filters in the app you use for showing the Data (like i.e., Postman).

CATEGORY STRUCTURE

You can use the **Category Structure** (Portal Categories in TRIMIT ERP) to filter the Masters/Items for which you want to export the Data if **Allow Product Export** is set to Yes.

For more details, see **White Paper – TRIMIT Category Management**.

USER FLAT ITEM ONLY

You can determine if you only want to export the Items and not the Masters based on the **Allow Product Export** and **Category Structure**.

LOG EXPORTED PRODUCTS

You can determine if you want to log all the exported Products (based on the **Category Structure** and **Use Flat Item Only**).

FASTTAB INVENTORY

Inventory

Allow Inventory Export ☒

Inventory Profile Setup Code ALL

Inventory Calculation Method Available

Export Future Deliveries ☐

ALLOW INVENTORY EXPORT

You can determine if you should be able to export Inventory/Available Quantities.

INVENTORY CALCULATION METHOD

If **Allow Inventory Export** is set to *Yes*, you are also able to determine which Quantities should be exported. You can choose between the following three options:

None	No Quantities will be exported.
Inventory	The Inventory Quantities will be exported.
Available	The Available Quantities will be exported based on the Inventory Profile Setup Code .


INVENTORY PROFILE SETUP CODE

If **Inventory Calculation Method** is set to *Available*, you need to determine which Quantities should be included in the calculation of the Available Quantities based on this **Inventory Profile Setup Code**.

EXPORT FUTURE DELIVERIES

Available Quantities will be calculated per Current Date, but if you also want to include Sales Lines with a Shipment Date > Current Date, you need to have a checkmark in **Export Future Deliveries**.

In Postman, it might then look as follows:

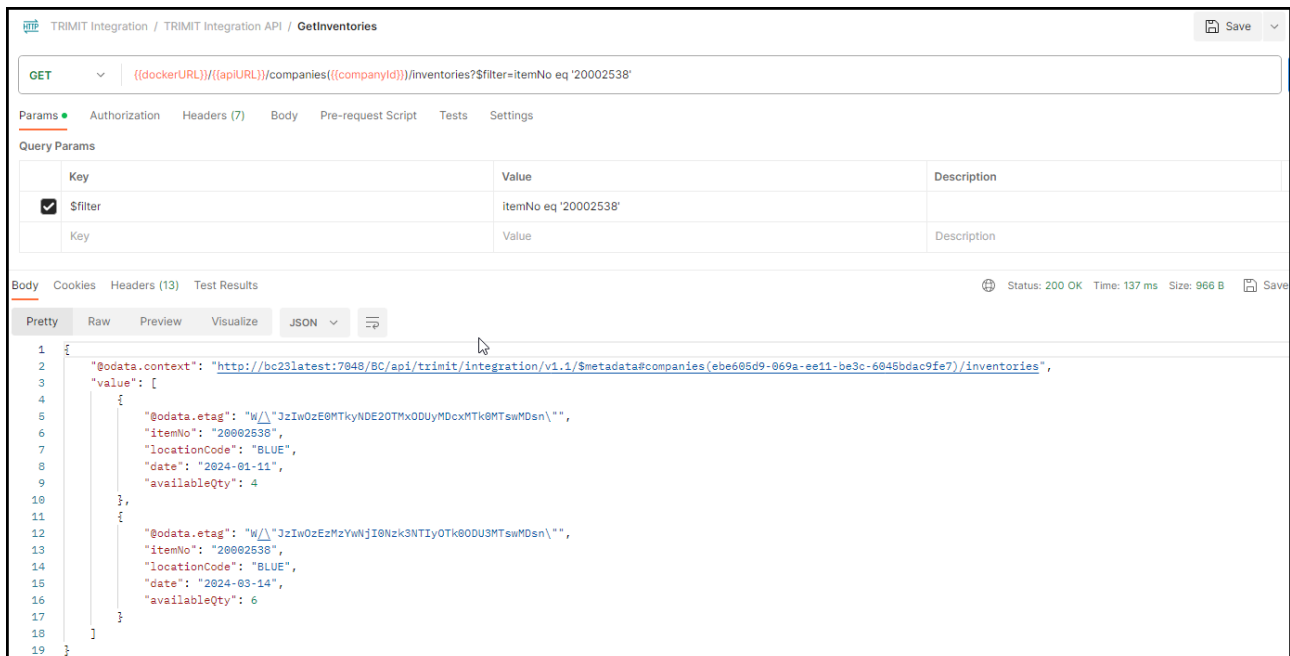

```

1 {
2   "@odata.context": "http://bc23latest:7848/BC/api/trimit/integration/v1.1/$metadata#companies(ebe685d9-869a-ee11-be3c-6845bdac9fe7)/inventories",
3   "value": [
4     {
5       "@odata.etag": "W/\"JzIwOzE0MTkyNDE2OTMxODUyMDcxMTk6MTswMDsn\"",
6       "itemNo": "20002538",
7       "locationCode": "BLUE",
8       "date": "2024-01-11",
9       "availableQty": 4
10    },
11    {
12       "@odata.etag": "W/\"JzIwOzE0MTkyNDE2OTMxODUyMDcxMTk6MTswMDsn\"",
13       "itemNo": "20002538",
14       "locationCode": "BLUE",
15       "date": "2024-03-14",
16       "availableQty": 6
17    }
18  ]
19 }
  
```

FASTTAB CUSTOMERS

Customers

Allow Customer Export

ALLOW CUSTOMER EXPORT

You can determine if it is allowed to export Customer data for the TRIMIT Service Function.
(It is not applicable for the Customer API page in Postman.)

FASTTAB SALES PRICES

Sales Prices

Allow Prices and Discounts Export

Price and Discount Calculation Cust. No.

CW00010

ALLOW PRICES AND DISCOUNTS EXPORT

You can determine if it is allowed to export Sales Prices.

PRICE AND DISCOUNT CALCULATION CUST. NO.

If **Allow Prices and Discounts Export** is set to **Yes**, you also can determine for which Customer the Sales Price should be determined (based on the **Customer Price Group** of the Customer) that needs to be exported.

If no **Customer** has been filled, it will look at the Price in the Customer Price Group of the **Standard Customer** in the **Sales & Receivables Setup**.

Sales & Receivables Setup

Sales & Receivables Setup

Customer Groups Payments More options

Customer

General

Order Creation Date Statistics

Order Date

Standard Customer

STD

Summary Invoice

Filter Summary Invoice

None

Summary Invoicing Controlled by

Sell-to Customer No.

Generate Summary Order by Batch ...

Blanket Order

Blanket Sales Order Search

Until Shipment Date (Ascending)

Blanket Sales Order Search on Locat...

WARNING: no blanket order found

Yes

Unless you have filled the [Currency Setup](#). So you can leave the **Price and Discount Calculation Cust. No.** blank, and then the Sales Price will be determined based on the [Currency Setup](#).

FASTTAB SALES DOCUMENTS

Sales Documents	
General Setup	
Default Order Type	
Default Sales Channel Code	
No. of Processing Retries	
Document Numbering Source	Default No. Series
Customer Setup	
Customer Handling	Use Customer Setup
Customer Sell-to Group	
Default Customer Nos.	
Sales Quote Setup	
Allow Sales Quote Import	☒
Sales Quote Nos.	
Auto Create Sales Quote	☒
Auto Release Sales Quote	☒
Sales Order Setup	
Allow Sales Order Import	☒
Sales Order Nos.	
Auto Create Sales Order	☒
Auto Release Sales Order	☒
Auto Create Pick Document From Sales Order	☒
Auto Post Shipment and Invoice	☒
Sales Invoice Setup	
Allow Sales Invoice Import	☒
Sales Invoice Nos.	
Auto Create Sales Invoice	☒
Auto Post Sales Invoice	☒
Sales Return Order Setup	
Allow Sales Return Order Import	☒
Sales Return Order Nos.	
Auto Create Sales Return Order	☒
Auto Release Sales Return Order	☒
Auto Post Receipt and Credit Memo	☒
Sales Credit Memo Setup	
Allow Sales Credit Memo Import	☒
Sales Credit Memo Nos.	
Auto Create Sales Credit Memo	☒
Auto Post Sales Credit Memo	☒
Reversal Setup	
Enable Reversal of Document	☒
Reversal Type	Reverse on Document Total
Reversal Order Action	Order is reversed to Return Order
Reversal Return Action	Return is reversed to Order

The FastTab **Sales Documents** is to determine how Integration Sales Documents should be handled.

DEFAULT ORDER TYPE

If you import Sales Documents, you can determine a specific **Order Type** for them in TRIMIT.

DEFAULT SALES CHANNEL CODE

If you import Sales Documents, you can determine a specific **Sales Channel** for them in TRIMIT.

NO. OF PROCESSING RETRIES


You can enter the number the import should be retried if anything disturbed the exchange of data.

DOCUMENT NUMBERING SOURCE

If you import Sales Documents, how should the **Sales Document Number** in TRIMIT be determined?

You can choose between the following three options:

Default No. Series	You can enter the No. Series in the Integration Setup for the different Sales Document Types.
Sales & Receivables No. Series	The No. Series filled in the Sales & Receivables Setup will be taken to determine the Number for the Sales Document in TRIMIT based on the

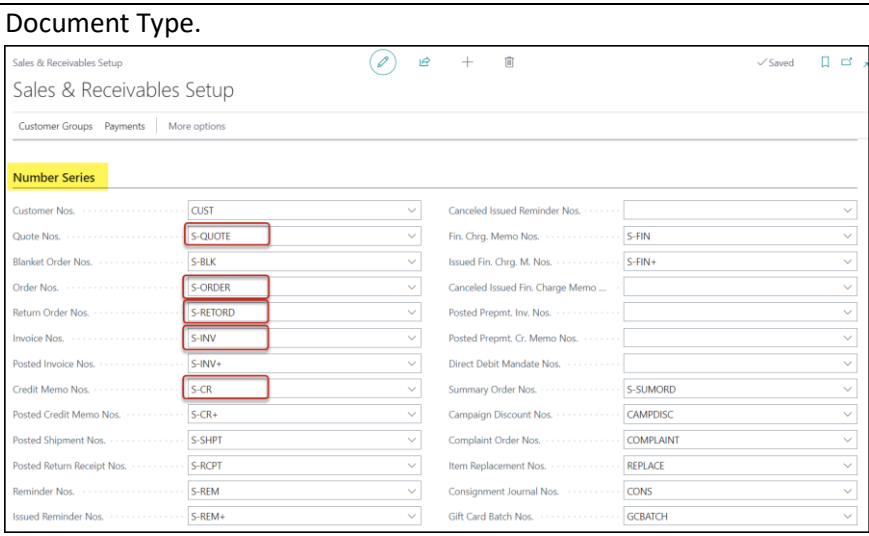	Document Type. 
Integration Document No.	The Document No. in the Integration Sales Document determines the Number for the Sales Document in TRIMIT. This might lead to problems if this Document No. is inside the regular No. Series that have been setup in the Sales & Receivables Setup.

CUSTOMER HANDLING

This field determines how the Customer should be determined for an Integration Sales Document. You can choose between the following three options:

Use Customer Setup	The Sell-to Customer in a regular Sales Document is determined by the Customer Setup. Based on the Customer Setup, the Sell-to Customer for the regular Sales Document in TRIMIT will be replaced, regardless the Customer No. that might be in the Integration Sales Document itself.
Use Customer Template Setup	The Sell-to Customer in a regular Sales Document is determined by the Customer Template Setup. Based on the Customer Template Setup a new Customer Number will be created using the appropriate Template and the Default Customer Nos. and this will replace the Customer No. that might be in the Integration Sales Document itself.
Apply Customer No. on Documents	The Sell-to Customer in a Sales Document is determined by the Customer No. in the Integration Sales Document.

NOTE

The third option might lead to errors, if the **Customer No.** in the Integration Sales Document is not yet known in TRIMIT.

CUSTOMER SELL-TO GROUP

You can determine a default **Sell-to Group** for a new created Customer based on an Integration Sales Document.

DEFAULT CUSTOMER NOS.

If **Customer Handling** is set to *Use Customer Template Setup* and a new Customer No. needs to be created, the system will determine that No. based on this **Default Customer Nos.** in which you can select a special No. Series. If this field is left blank, the regular **Customer Nos.** No. Series in the Sales & Receivables Setup will be taken.

ALLOW SALES QUOTE IMPORT

You can determine if it is allowed to import **Sales Quotes**.


SALES QUOTE NOS.

If **Document Numbering Source** is set to *Default No. Series*, you can enter a **No. Series** for the Integration Sales Quotes. Based on this **No. Series** the number for the regular **Sales Quote** will be determined. The Document Number of the Integration Sales Quote will then be placed in the **External Document Number** of the regular Sales Quote.

AUTO CREATE SALES QUOTE

Based on the Integration Sales Quote should a regular Sales Quote be created based on a **Job Queue** or should the Integration Sales Quote remain in the **Integration Sales Documents**, from where it can be 'posted' manually to become a regular Sales Quote.

You can create the necessary **Job Queue** via **Actions, Documents, Create Sales Posting Job Queue Job**.

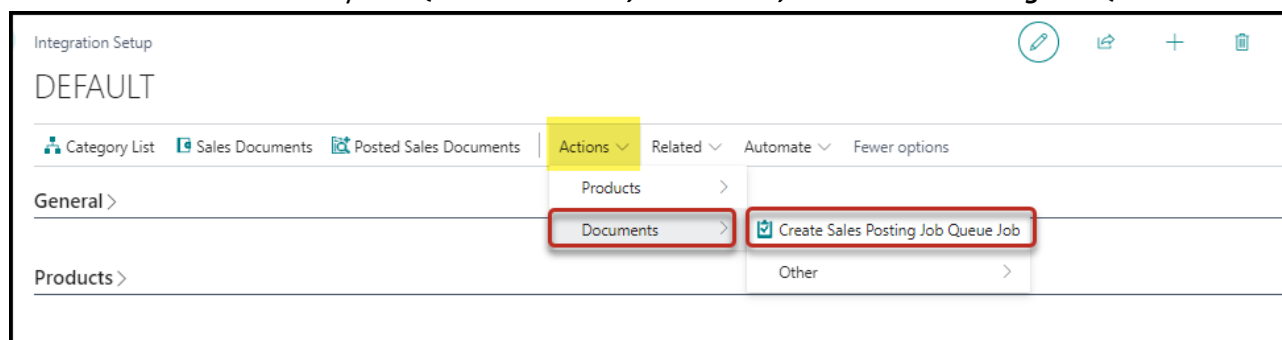

AUTO RELEASE SALES QUOTE

If **Auto Create Sales Quote** is set to *Yes*, and a regular **Sales Quote** is created, you can determine if it also should be *Released* right away.

ALLOW SALES ORDER IMPORT

You can determine if it is allowed to import **Sales Orders**.

SALES ORDER NOS.

If **Document Numbering Source** is set to *Default No. Series*, you can enter a **No. Series** for the Integration Sales Orders. Based on this **No. Series** the number for the regular **Sales Order** will be determined. The Document Number of the Integration Sales Order will then be placed in the **External Document Number** of the regular Sales Order.

AUTO CREATE SALES ORDER

Based on the Integration Sales Order should a regular Sales Order be created based on a **Job Queue** or should the Integration Sales Order remain in the **Integration Sales Documents**, from where it can be 'posted' manually to become a regular Sales Order.

You can create the necessary **Job Queue** via *Actions, Documents, Create Sales Posting Job Queue Job*.

AUTO RELEASE SALES ORDER

If **Auto Create Sales Order** is set to *Yes*, and a regular **Sales Order** is created, you can determine if it also should be *Released* right away.

AUTO CREATE PICK DOCUMENT FROM SALES ORDER

If **Auto Create Sales Order** is set to *Yes*, and **Auto Release Sales Order** is set to *Yes*, and therefore, a regular **Sales Order** is created and released, you can determine if also a **TRIMIT Pick Document** should be created for that regular Sales Order immediately.

AUTO POST SHIPMENT AND INVOICE

If **Auto Create Sales Order** is set to *Yes*, and a regular **Sales Order** is created, you can also determine if that regular **Sales Order** should be posted as a *Shipment* and *Invoice* immediately.

ALLOW SALES INVOICE IMPORT

You can determine if it is allowed to import **Sales Invoices**.

SALES INVOICE NOS.

If **Document Numbering Source** is set to *Default No.Series*, you can enter a **No. Series** for the Integration Sales Invoices. Based on this **No. Series** the number for the regular **Sales Invoice** will be determined. The Document Number of the Integration Sales Invoice will then be placed in the **External Document Number** of the regular Sales Invoice.

Unless the [Use Gen. Journal for Sales Invoice Posting](#) is set to *Yes*.

In that case no regular Sales Invoice will be created, but a General Journal Line of **Document Type Invoice** and the **Document No.** is determined by this **Sales Invoice Nos.**, but you will lose the original Document Number of the Integration Sales Invoice.

AUTO CREATE SALES INVOICE

Based on the Integration Sales Invoice should a regular Sales Invoice be created based on a **Job Queue** or should the Integration Sales Invoice remain in the **Integration Sales Documents**, from where it can be 'posted' manually to become a regular Sales Invoice.

You can create the necessary **Job Queue** via *Actions, Documents, Create Sales Posting Job Queue Job*.

AUTO POST SALES INVOICE

If **Auto Create Sales Invoice** is set to *Yes*, and a regular **Sales Invoice** is created, you can also determine if that regular **Sales Invoice** should be posted immediately.

ALLOW SALES RETURN ORDER IMPORT

You can determine if it is allowed to import **Sales Return Orders**.

SALES RETURN ORDER NOS.

If **Document Numbering Source** is set to *Default No. Series*, you can enter a **No. Series** for the Integration Sales Return Orders. Based on this **No. Series** the number for the regular **Sales Return Order** will be determined.

The Document Number of the Integration Sales Return Order will then be placed in the **External Document Number** of the regular Sales Return Order.

AUTO CREATE SALES RETURN ORDER

Based on the Integration Sales Return Order should a regular Sales Return Order be created based on a **Job Queue** or should the Integration Sales Return Order remain in the **Integration Sales Documents**, from where it can be 'posted' manually to become a regular Sales Return Order.

You can create the necessary **Job Queue** via **Actions, Documents, Create Sales Posting Job Queue Job**.

AUTO RELEASE SALES RETURN ORDER

If **Auto Create Sales Return Order** is set to *Yes*, and a regular **Sales Return Order** is created, you can determine if it also should be *Released* right away.

AUTO POST RECEIPT AND CREDIT MEMO

If **Auto Create Sales Return Order** is set to *Yes*, and a regular **Sales Return Order** is created, you can also determine if that regular **Sales Return Order** should be posted as a *Receipt* and *Credit Memo* immediately.

ALLOW SALES CREDIT MEMO IMPORT

You can determine if it is allowed to import **Sales Credit Memos**.

SALES CREDIT MEMO NOS.

If **Document Numbering Source** is set to *Default No. Series*, you can enter a **No. Series** for Integration Sales Credit Memos. Based on this **No. Series** the number for the regular **Sales Credit Memo** will be determined. The Document Number of the Integration Sales Credit Memo will then be placed in the **External Document Number** of the regular Sales Credit Memo.

Unless the [Use Gen. Journal for Credit Memo Posting](#) is set to *Yes*.

In that case no regular Sales Credit Memo is created, but a General Journal Line of **Document Type Credit Memo** and the **Document No.** is determined by this **Sales Credit Memo Nos.**, but you will lose the original Document Number of the Integration Sales Credit Memo.

AUTO CREATE SALES CREDIT MEMO

Based on the Integration Sales Credit Memo should a regular Sales Credit Memo be created based on a **Job Queue** or should the Integration Sales Credit Memo remain in the **Integration Sales Documents**, from where it can be 'posted' manually to become a regular Sales Credit Memo.

You can create the necessary **Job Queue** via **Actions, Documents, Create Sales Posting Job Queue Job**.

AUTO POST SALES CREDIT MEMO

If **Auto Create Sales Credit Memo** is set to *Yes*, and a regular **Sales Credit Memo** is created, you can also determine if that regular **Sales Credit Memo** should be posted immediately.

ENABLE REVERSAL OF DOCUMENT

You can determine if it should be possible to reverse an Integration Sales Document.

This could be applicable if the **Quantity** in the Integration Sales Document is negative.

REVERSAL TYPE

At this point the only option is *Reverse on Document Total*, so it is not possible only to reverse some of the Lines.

REVERSAL ORDER ACTION

If **Enable Reversal of Document** is set *Yes*, and the Integration Sales Document is a Sales Order and the Quantity is negative, you can determine how it should be reversed:

Order is reversed to Return Order or Order is reversed to Credit Memo.

This means, that although the Integration Sales Document has a Document Type *Order*, it will actually be created as a regular *Sales Return Order* or *Sales Credit Memo*.

REVERSAL RETURN ACTION

If **Enable Reversal of Document** is set *Yes*, and the Integration Sales Document is a Sales Return Order, you can determine how it should be reversed:

Return is reversed to Order or Return is reversed to Invoice.

This means, that although the Integration Sales Document has a Document Type *Return Order*, it will actually be created as a regular *Sales Order* or *Sales Invoice*.

Keep in mind however that if it is reversed (when posting the **Integration Sales Document**) to an Order or Invoice, it will get the regular Document Number based on the **Document Numbering Source** and the **Sale Return Order Nos.**

Sales Documents								
Integration Sales Documents								
Document Type	No.	Sell-to Customer No.	Sell-to Customer Name	Location Code	Salesperson Code	Sales Channel	Int. Document No.	Import Status
Return Order	1004	CW0042				B2C	1029	Open

Posted Documents								
Integration Sales Documents								
Document Type	No.	Sell-to Customer No.	Sell-to Customer Name	Location Code	Salesperson Code	Sales Channel	Int. Document No.	
Order	0100013	CW0042				B2C	1027	
Order	1002	CW0042				B2C	1025	
Order	1003	CW0042				B2C	1028	
Invoice	1004	CW0042				B2C	1029	
Invoice	102222	CW0042				B2C	1022	
Invoice	102223	CW0042				B2C	1023	
Invoice	102224	CW0042				B2C	1024	

USE GEN. JOURNAL FOR SALES INVOICE POSTING

Not shown in the page by default, but you can add it via **Personalize**.


If you do not want to have a regular Sales Invoice created for an Integration Sales Invoice, you can set this field to *Yes*.

In that case, when 'posting' the Integration Sales Invoice, it will create a Journal Line in the **General Journal Template Name** and the **General Journal Batch Name**.

Keep in mind however, that only the **Customer** will be filled and an **Amount**, and not a **Balance Account** on the General Journal Line.

An Example:

If I would have the following data that should be imported:

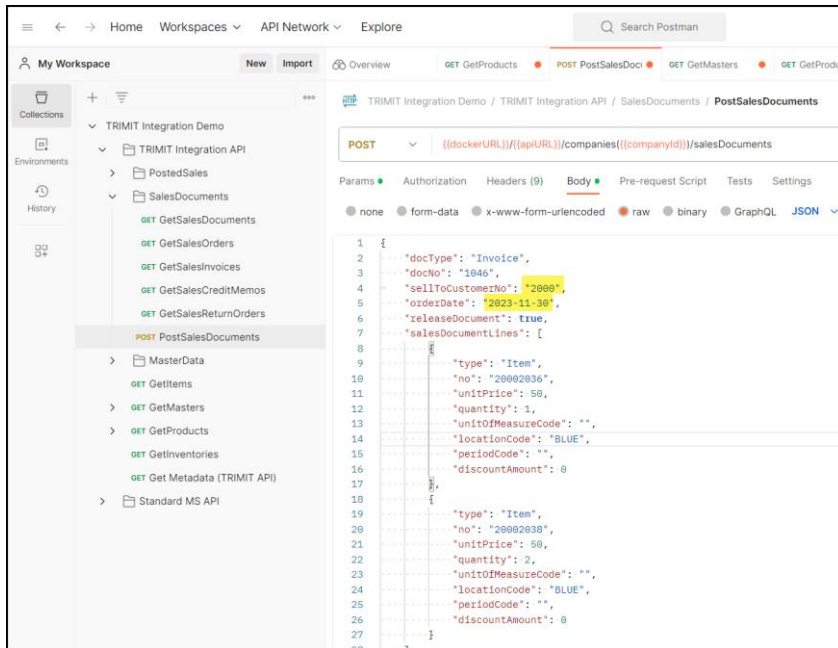

I would have a total Amount of $(1 \times 50) + (2 \times 50) = 150$. This would result in a General Journal Line:

General Journals														
Batch Name: IMPORTED														
Manage Home Request Approval Line Incoming Document Page More options														
Post Get Standard Journals... Renumber Document Numbers Reconcile Apply Entries...														
Posting Date	VAT Date	Document Type	Document No.	Account Type	Account No.	Account Name	Description	Curre. Code	EU 3-Party Trade	Gen. Posting Type	Gen. Bus. Posting Group	Gen. Prod. Posting Group	Amount	Amount (LCV)
11/30/2023	11/30/2023	Invoice	102225	Customer	2000	The Fashion Store UK	Integration Document 102225						150.00	150.00
													G/L Account	

Therefore, you need to complete the Line, i.e., with an **Bal. Account No.** before posting.

As you can see, nothing will happen with the Items itself; so do not use this function if Items are involved!!

USE GEN. JOURNAL FOR CREDIT MEMO POSTING

Not shown in the page by default, but you can add it via **Personalize**.

If you do not want to have a regular Sales Credit Memo created for an Integration Sales Credit Memo, you can set this field to Yes.

In that case, when 'posting' the Integration Sales Credit Memo, it will create a Journal Line in the **General Journal Template Name** and the **General Journal Batch Name**.

Keep in mind however, that only the **Customer** will be filled and the **Amount**, and not a **Balance Account** on the General Journal Line.

GENERAL JOURNAL TEMPLATE NAME

Not shown in the page by default, but you can add it via **Personalize**.

In case you have set the **Use Gen. Journal for Sales Invoice Posting** and/or the **Use Gen. Journal for Credit Memo Posting** set to Yes, you also need to fill the **General Journal Template Name** and the **General Journal Batch Name**.

GENERAL JOURNAL BATCH NAME

Not shown in the page by default, but you can add it via **Personalize**.

In case you have set the **Use Gen. Journal for Sales Invoice Posting** and/or the **Use Gen. Journal for Credit Memo Posting** set to **Yes**, you also need to fill the **General Journal Template Name** and the **General Journal Batch Name**.

FASTTAB POSTED SALES DOCUMENTS

Posted Sales Documents	
Allow Posted Shipment Export	☒
Allow Posted Sales Invoice Export	☒
Allow Posted Return Receipt Export	☒
Allow Posted Sales Credit Memo Ex...	☒

ALLOW POSTED SHIPMENT EXPORT

You can determine if it is allowed to export **Posted Shipments**.

ALLOW POSTED SALES INVOICE EXPORT

You can determine if it is allowed to export **Posted Sales Invoices**.


ALLOW POSTED RETURN RECEIPT EXPORT

You can determine if it is allowed to export **Posted Sales Return Receipts**.

ALLOW POSTED SALES CREDIT MEMO EXPORT

You can determine if it is allowed to export **Posted Sales Credit Memos**.

ACTIONS, PRODUCTS

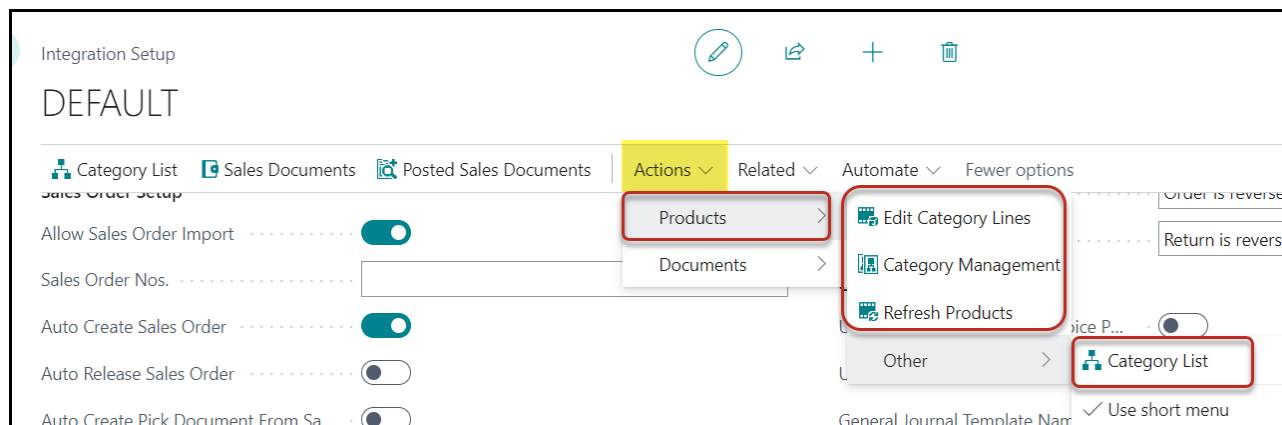

Integration Setup

DEFAULT

Category List Sales Documents Posted Sales Documents Actions Related Automate Fewer options

Products Documents

Edit Category Lines Category Management Refresh Products Other Category List

Use short menu

EDIT CATEGORY LINES

The system will show the **Category Lines** of the [Category Structure](#) and you are able to add/delete/change the Lines; keep in mind however, that if you also use the same [Category Structure](#) for the TRIMIT Portals, this will also influence your TRIMIT Portals.

CATEGORY MANAGEMENT

This will show you the Items and in which Category they might be.

It is also possible to attach Items to Categories.

For more details, see **White Paper – TRIMIT Category Management**.


REFRESH PRODUCTS

This will refresh the Category Buffer. So in case you have changed the content of the [Category Structure](#) it is advised to use this Action, to make sure that the Category Buffer is up-to-date.

CATEGORY LIST

This will show the **Category Tree View** of the content of the [Category Structure](#).

ACTIONS, DOCUMENTS

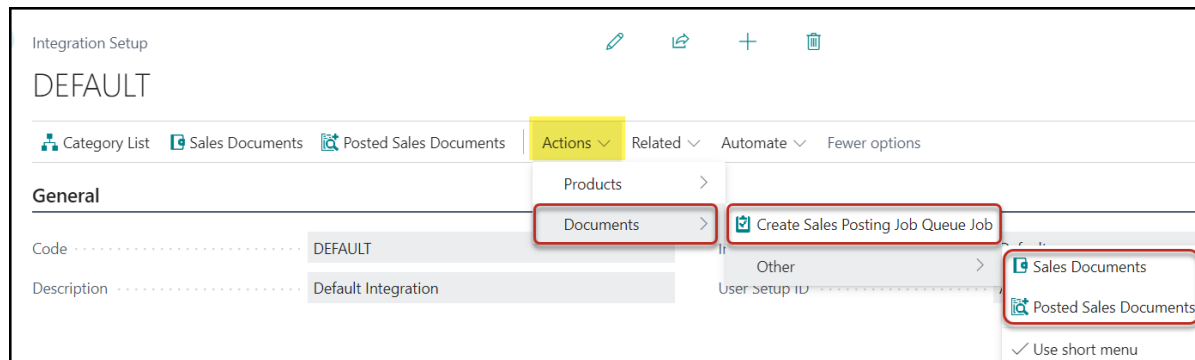

CREATE SALES POSTING JOB QUEUE JOB

This Action will create a **Job Queue** for you for **Codeunit 6036865 trm Integration Post SalesDoc**, after which you can change the details.

NOTE

This is NOT possible to create by an “Delegated Administrator”. It can only be created by a “Normal Administrator”.

This **Job Queue** will make sure that the Integration Sales Documents will be ‘posted’ after they have been imported, so you do not have to do this manually.

This **Job Queue** is necessary if you have set one or more of the following fields to Yes to actually create the regular Sales Document ‘automatically’.

- Auto Create Sales Quote
- Auto Create Sales Order
- Auto Create Sales Return Order
- Auto Create Sales Invoice
- Auto Create Sales Credit Memo

Job Queue Entry Card

Codeunit · 6036865 · trm Integration Post SalesDoc

To edit the job queue entry, you must first choose the Set On Hold action. Set On Hold

Home Job Queue Actions Automate Fewer options

Set Status to Ready Set On Hold Restart Run once (foreground) Show Error

General

Object Type to Run Codeunit

Object ID to Run 6036865

Object Caption to Run trm Integration Post SalesDoc

Description Created for automatic processing of TRIMIT Integration Sal...

Earliest Start Date/Time 12/4/2023 9:51 AM

Job Timeout 12 hours

Status Ready

Recurrence

Recurring Job ☐

Run on Mondays ☐

Run on Tuesdays ☐

Run on Wednesdays ☐

Run on Thursdays ☐

Run on Fridays ☐

Run on Saturdays ☐

Run on Sundays ☐

Next Run Date Formula

Starting Time

Ending Time

No. of Minutes between Runs 2

Inactivity Timeout Period 5

SALES DOCUMENTS

This will open the page with the Integration Sales Documents, which will show you only the data that was imported.

Sales Documents

Integration Sales Documents Search Manage Related Posting Related Automate Fewer options

Document Type	No.	Sell-to Customer No.	Sell-to Customer Name	Location Code	Salesperson Code	Sales Channel	Int. Document No.	Import Status
Order	0100025	2000				B2C	1048	Open
Order	0100026	2010				B2C	1049	Open
Order	0100027	2020				B2C	1050	Open
Return Order	1010	2000				B2C	1047	Open

Sales Documents

Integration Sales Documents Search Manage Related Posting Related Automate Fewer options

Payment

Other

Extra Order Info


Use short menu

Document Type	No.	Sell-to Customer No.	Sell-to Customer Name
Order	0100028	2000	

With **Related, Payment**, it will show you the Payment that was also imported.

With **Related, Extra Order Info**, it will show you the Extra Order Info that was also imported.

Both are based on the functionality we already have for our regular TRIMIT Portals.

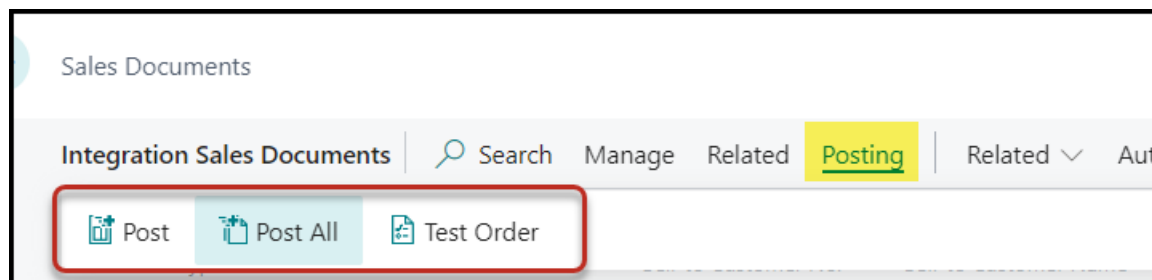


With **Posting, Post**, you can create the regular Sales Document for the current Line you are standing on.
 With **Posting, Post All**, you can create the regular Sales Documents for all the Lines at once.
 With **Posting, Test Order**, you can test the data that was imported: Can the **Sales Document** be posted?

POSTED SALES DOCUMENTS

After an Integration Sales Document has been posted (manually or by the Job Queue), you will see it in the page **Posted Sales Documents**, but still only based on the data that has been imported, and the settings in the **Integration Setup** regarding the **No.** and the **Sell-to Customer No.**

Posted Documents							
Integration Sales Documents Search Manage Related Related ▾ Automate ▾ Fewer options							
Document Type	No.	Sell-to Customer No.	Sell-to Customer Name	Location Code	Salesperson Code	Sales Channel	Int. Document No. ↓
Order	0100028	2000				B2C	1051
Order	0100027	2020				B2C	1050
Order	0100026	2010				B2C	1049
Order	0100025	2000				B2C	1048
Invoice	1010	2000				B2C	1047
Invoice	102225	2000				B2C	1046
Order	0100024	CW00010				B2C	1045

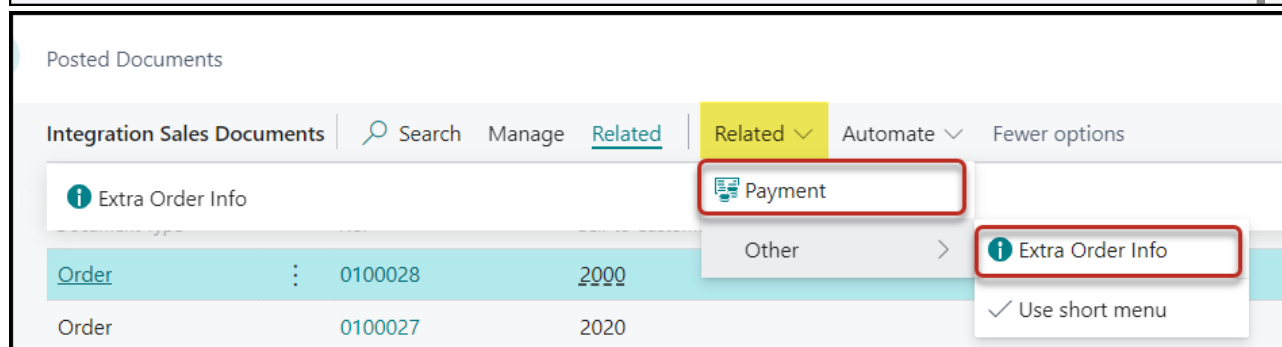

With **Related, Payment**, it will show you the Payment that was also imported and posted.
 With **Related, Extra Order Info**, it will show you the Extra Order Info that was also imported.
 Both are based on the functionality we already have for our regular TRIMIT Portals.

RELATED

Integration Setup

DEFAULT

Category List Sales Documents Posted Sales Documents Actions Related Automate Fewer options

General

Code DEFAULT

Description Default Integration

Products

Allow Product Export ☐

Language Setup

Currency Setup

Location Setup

Customer Setup

Customer Template Setup

Item Setup

Table Data Setup

LANGUAGE SETUP

You can setup the **Language Codes** for which the Master (Item) Descriptions and Extended Text could be exported.

Language Setup

✓ Saved

Search + New Edit List Delete

Language Code ↑	Name
DAN	Danish
DEU	German
ENU	English
NLD	Dutch
NOR	Norwegian

If you however have a checkmark in **Use Flat Item Only**, you will have to enter the Language related Descriptions on Item level; it will not construct it based on the Master Description Translations and the Variant Description Translations.

This is applicable for the following External API pages:

page 6037839 trm EAPI Item Description

page 6037851 trm EAPI Master Description

page 6037879 trm EAPI Product Description

CURRENCY SETUP

For the export of Sales Prices, you can fill multiple combinations of **Currency Code** and **Customer Price Group**, to export several Sales Prices.

If the **Currency Setup** is not filled, it will export the Sales Price based on the **Customer Price Group** and **Currency Code** of the [Price and Discount Calculation Cust. No.](#) If this field is not filled, it will take the **Customer Price Group** and **Currency Code** of the **Standard Customer** in the Sales & Receivables Setup.

Currency Setup					✓ Saved	↗	↗
🔍 Search	+ New	📋 Edit List	🗑 Delete		↗	🔍	☰
Currency Code ↑	Description	Customer Price Group ↑	Description				
→		⋮		RETAIL	Retail Prices		
	EUR		Euro	RETAIL	Retail Prices		

LOCATION SETUP

You need to setup the **Locations** that can be used in the imported Sales Documents:

Location Setup					✓ Saved	↗	↗
🔍 Search	+ New	📋 Edit List	🗑 Delete		↗	🔍	☰
Location Code ↑	Description			Default			
→	BLUE	⋮	BLUE	☒			
	CW		Central Warehouse	☐			

If the imported Sales Document does not have a **Location**, it will be set to the **Location Code** in the **Location Setup** that has a checkmark in **Default**.

If the Integration Sales Document contains a **Location** that is not in the **Location Setup**, the import will fail.

CUSTOMER SETUP

Per **Country** you can setup the default **Customer No.** that should be taken in the Integration Sales Document if [Customer Handling](#) is set to *Use Customer Setup*.

The **Country/Region Code** will be checked with the **Ship-to Country/Region Code** from the Integration Sales Document.

Customer Setup					✓ Saved		
 Search  New  Edit List  Delete							
Country/Region Code ↑		Name	Customer No. ↑	Name			
→	▼	⋮	2000	The Fashion Store UK			
GB		Great Britain	2000	The Fashion Store UK			
DE		Germany	2010	The Shoe Store Europe			
US		USA	2040	Garment Company Ltd.			

This will overrule any **Customer No.** that might be in the Integration Sales Document, and you will not see that **Customer No.** anywhere anymore in the regular Sales Document.

CUSTOMER TEMPLATE SETUP

Per **Country** you can setup the default **Customer Template Setup** that should be used to create a new Customer for an imported Sales Document if [Customer Handling](#) is set to *Use Customer Template Setup*.

The **Country/Region Code** will be checked with the **Sell-to Country/Region Code** from the Integration Sales Document.

Customer Template Setup					✓ Saved		
 Search  New  Edit List  Delete							
Template No. ↑		Description	Country/Region Code ↑	Name			
→	CUSTB2C ▼	⋮	Trimit B2C Domestic Customer Template				
	CUSTOMER01		Trimit Customer Domestic Template	GB	Great Britain		
	CUSTOMER02		Trimit Customer EU Template	BE	Belgium		
	CUSTOMER02		Trimit Customer EU Template	DE	Germany		
	CUSTOMER02		Trimit Customer EU Template	NL	Netherlands		
	CUSTOMER03		Trimit Customer Foreign Template	US	USA		

This will only happen if there is not an existing **Customer No.** with the same **Sell-to Type** and **E-Mail**. In that case the existing **Customer No.** will be taken.

ITEM SETUP

You can determine that if specific Item Numbers come in from the Integration Sales Documents, that it should be changed into another Item Number or a G/L Account.

Item Setup						
Search + New Edit List Delete						
Integration Item No. ↑	Country/Region Code ↑	Country/Region Name	Type	No.	Description	
1234			Item	20002040	Olivia Trousers	
→ TRANSPORT			G/L Account	9996820	Freight Webshop +	


TABLE DATA SETUP

In **Table Data Setup**, you are able to add Fields from the Customer, Item or Master, that should be shown if you **Expand** the Product Data or Customer Data for the **ConfiguredFields**.

This can easily be used for Customized fields in your Customer, Item or Master to be exported.

Table Data Setup				
Search + New Edit List Delete				
Table Number ↑	Table Name	Field Number ↑	Field Name	
6037103	trm Master	420	Gross Weight	
6037103	trm Master	421	Net Weight	
→ 18	Customer	18	Chain Name	
27	Item	37	Alternative Item No.	

I.e.:

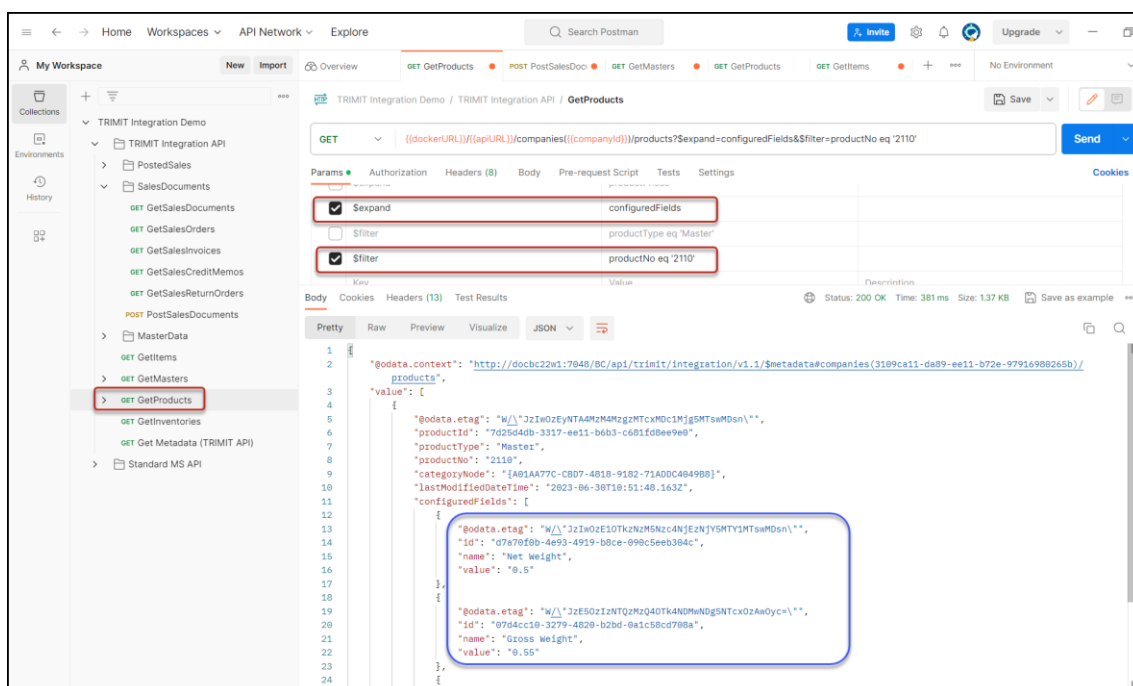

```


GET {{dockerURL}}/f(apiURL)/companies({companyId})/products?expand=configuredFields&filter=productNo eq '2110'

Params
Expand: configuredFields
Filter: productNo eq '2110'

Body
Raw
JSON
Pretty
1 {
2   "@odata.context": "http://docbc2w1-7048/BC/api/trimit/integration/v1.1/$metadata#companies(3109c11-d809-ee11-b72e-97916908265b)/products",
3   "value": [
4     {
5       "@odata.etag": "W/\"J2Iw0zEYNTA4MzM4Mzg2HTcxMDc1Mjg5MTswMDsn\"",
6       "productId": "7d25d4db-3317-ee11-b6b3-c601fd8ee9e0",
7       "productType": "Master",
8       "productNo": "2110",
9       "categoryNode": "[A01AA77C-CB07-4B18-9182-71A0DC4849B8]",
10      "lastModifiedDate": "2023-06-30T10:51:48.163Z",
11      "configuredFields": [
12        {
13          "@odata.etag": "W/\"J2Iw0zEYNTA4MzM4Mzg2HTcxMDc1Mjg5MTswMDsn\"",
14          "id": "d7a78f0b-4e93-4919-b0ce-690c5eeb384c",
15          "name": "Net Weight",
16          "value": "0.5"
17        },
18        {
19          "@odata.etag": "W/\"J2E50zIzNTQzNzQ0Tkd4NDMwNDg5NTcxOzAwOyc\"",
20          "id": "07d4cc10-3279-4820-b2bd-6a1c8cd788a",
21          "name": "Gross Weight",
22          "value": "0.55"
23        }
24      ]
25    }
26  ]
27 }
  
```

TRIMIT'S POSTMAN.JSON

In our **Postman collection .json**-file we also added documentation. Via the three dots, **View Documentation**, you can find all the documentation we embedded in the **Postman collection .json**-file.

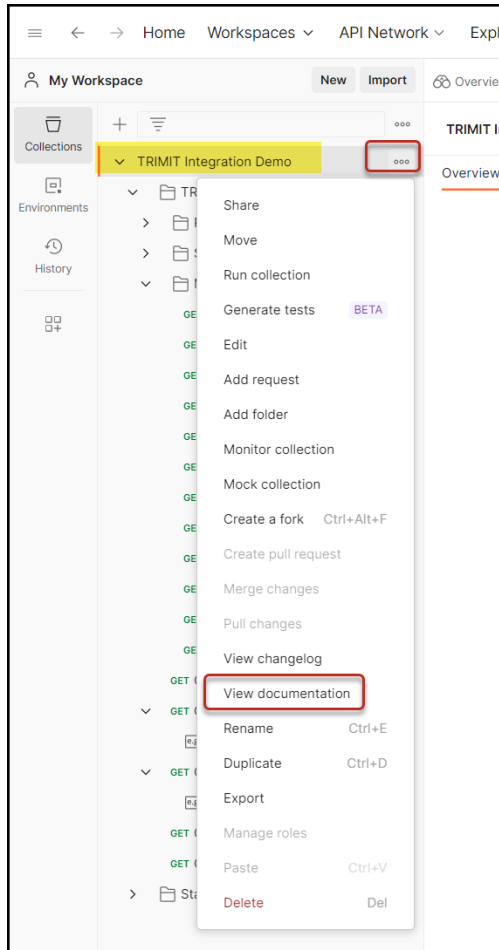

The screenshot shows the Postman interface with the 'TRIMIT Integration Demo' collection selected. A context menu is open, and the 'View documentation' option is highlighted. The right pane shows the 'GET GetItems' request with its URL and a list of subviews.

GET GetItems


[http://docbc22w1:7048/BC/api/trimit/integration/v1.1/companies\(3109ca11-da89-ee11-b72e-97916980265b\)/items](http://docbc22w1:7048/BC/api/trimit/integration/v1.1/companies(3109ca11-da89-ee11-b72e-97916980265b)/items)

This request will return all **Items** from the Item table in BC.

Several expands (subviews) are possible.

- unitOfMeasure:**
This subview will give the related unit of measure for this item.
- extendedDescriptions:**
This subview will give a list of all the descriptions and extended descriptions for this item. The configuration of which languages to export descriptions for is done in the **Integration Setup** in BC.
- defaultDimensions:**
This subview will give a list of all the related BC Default Dimensions for this item.
- attributes:**
This subview will give a list of all the related BC Item Attributes and their values for this item.
- itemStatGroups:**
This subview will give a list of all the related TRIMIT Statistics Groups and their values for this item.
- picture:**
This subview will give a list of all the related pictures for this item.
- itemCompositions:**
This subview will give a list of all the related TRIMIT Compositions for this item.
- itemAddInfos:**
This subview will give a list of all the related TRIMIT Additional Informations for this item.
- itemCarelabels:**

It is also possible to see the Documentation for a specific export/import:

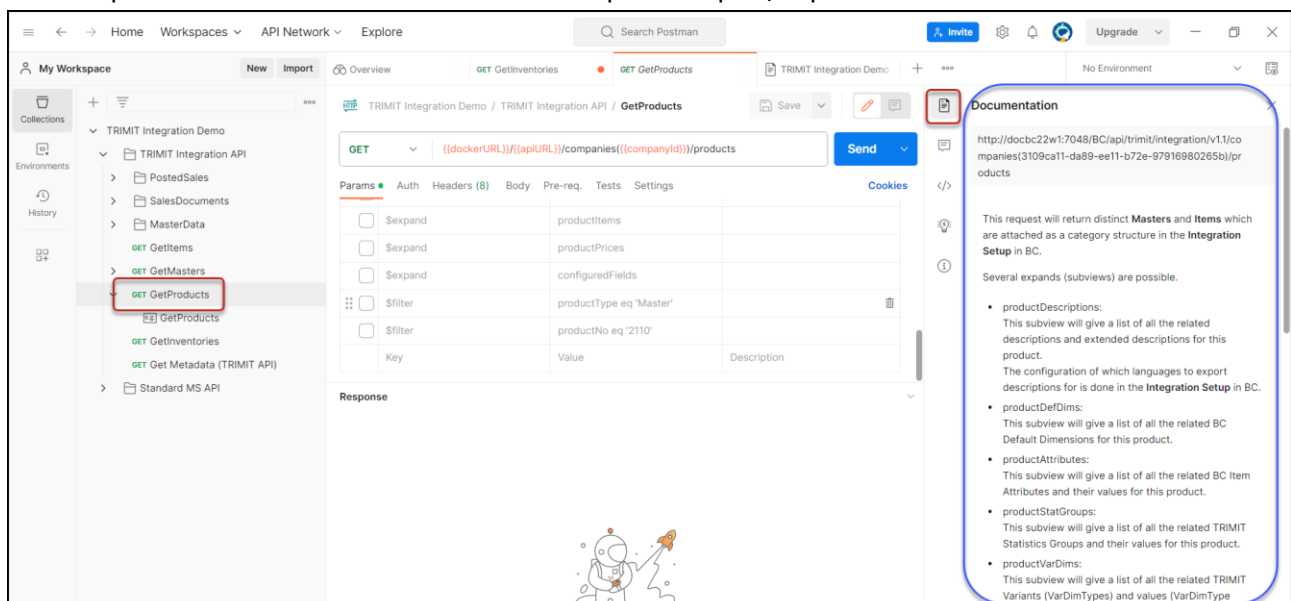

The screenshot shows the Postman interface with the 'GET GetProducts' request selected. A context menu is open, and the 'View documentation' option is highlighted. The right pane shows the 'GET GetProducts' request with its URL and a list of subviews.

GET GetProducts

[http://docbc22w1:7048/BC/api/trimit/integration/v1.1/companies\(3109ca11-da89-ee11-b72e-97916980265b\)/products](http://docbc22w1:7048/BC/api/trimit/integration/v1.1/companies(3109ca11-da89-ee11-b72e-97916980265b)/products)


This request will return distinct **Masters** and **Items** which are attached as a category structure in the **Integration Setup** in BC.

Several expands (subviews) are possible.

- productDescriptions:**
This subview will give a list of all the related descriptions and extended descriptions for this product. The configuration of which languages to export descriptions for is done in the **Integration Setup** in BC.
- productDefDims:**
This subview will give a list of all the related BC Default Dimensions for this product.
- productAttributes:**
This subview will give a list of all the related BC Item Attributes and their values for this product.
- productStatGroups:**
This subview will give a list of all the related TRIMIT Statistics Groups and their values for this product.
- productVarDims:**
This subview will give a list of all the related TRIMIT Variants (VarDimTypes) and values (VarDimType

APPENDIX 1: CODEUNIT 6036860

You can also find Documentation to help you in the AL Code itself of Codeunit **6036860 trm Integration Handling** before all the Procedures. I.e.,

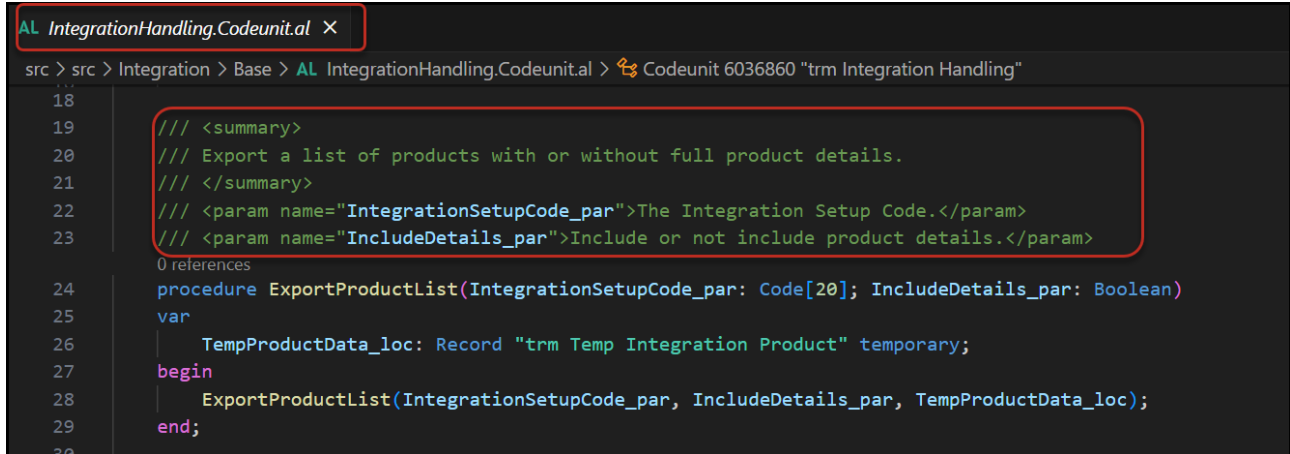

```

AL IntegrationHandling.Codeunit.al X
src > src > Integration > Base > AL IntegrationHandling.Codeunit.al > Codeunit 6036860 "trm Integration Handling"
18
19    /// <summary>
20    /// Export a list of products with or without full product details.
21    /// </summary>
22    /// <param name="IntegrationSetupCode_par">The Integration Setup Code.</param>
23    /// <param name="IncludeDetails_par">Include or not include product details.</param>
    0 references
24    procedure ExportProductList(IntegrationSetupCode_par: Code[20]; IncludeDetails_par: Boolean)
25    var
26        TempProductData_loc: Record "trm Temp Integration Product" temporary;
27    begin
28        ExportProductList(IntegrationSetupCode_par, IncludeDetails_par, TempProductData_loc);
29    end;
30
  
```

The following of this **Appendix 1** is an overview of all the documentation in this Codeunit.

EXPORTPRODUCTLIST()

Export a list of products with or without full product details.

Syntax

ExportProductList(IntegrationSetupCode_par: Code[20], IncludeDetails_par: Boolean)

Parameters

IntegrationSetupCode_par

Type: Code[20]

The Integration Setup Code.

IncludeDetails_par

Type: Boolean

Include or not include product details.

EXPORTPRODUCTLIST()

Export a list of products with or without full product details using a Data Container.

Syntax

ExportProductList(IntegrationSetupCode_par: Code[20], IncludeDetails_par: Boolean, var DataContainer_par: Codeunit "trm Integration Data Container")

Parameters

IntegrationSetupCode_par

Type: Code[20]

The Integration Setup Code.

IncludeDetails_par

Type: Boolean

Include or not include product details.

DataContainer_par

Type: Codeunit "trm Integration Data Container"

The Data Container is a single instance data cache codeunit, where the exported data is persisted

EXPORTPRODUCTLIST()

Export a list of products with or without full product details returning the data.

Syntax

```
ExportProductList(IntegrationSetupCode_par: Code[20], IncludeDetails_par: Boolean,  
var TempProductData_par: Record "trm Temp Integration Product" temporary)
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

The Integration Setup Code.

IncludeDetails_par

Type: Boolean

Include or not include product details.

TempProductData_par

Type: Record "trm Temp Integration Product"

The Product Data in a temporary table

EXPORTPRODUCT()

Export product data for a specific master or item.

Syntax

```
ExportProduct(IntegrationSetupCode_par: Code[20], ProductType_par: Enum "trm  
Integration Product Type", ProductNo_par: Code[20])
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

The Integration Setup Code.

ProductType_par

Type: Enum "trm Integration Product Type"

The product type of the specific product.

ProductNo_par

Type: Code[20]

The product no. of the specific product.

EXPORTPRODUCT()

Export product data for a specific master or item using a Data Container

Syntax

```
ExportProduct(IntegrationSetupCode_par: Code[20], ProductType_par: Enum "trm  
Integration Product Type", ProductNo_par: Code[20], var DataContainer_par:  
Codeunit "trm Integration Data Container")
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

The Integration Setup Code.

ProductType_par

Type: Enum "trm Integration Product Type"

The product type of the specific product.

ProductNo_par

Type: Code[20]

The product no. of the specific product.

DataContainer_par

Type: Codeunit "trm Integration Data Container"

The Data Container is a single instance data cache codeunit, where the exported data is persisted

EXPORTPRODUCT()

Export product data for a specific master or item returning the data.

Syntax

```
ExportProduct(IntegrationSetupCode_par: Code[20], ProductType_par: Enum "trm  
Integration Product Type", ProductNo_par: Code[20], var TempProductData_par:  
Record "trm Temp Integration Product" temporary)
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

The Integration Setup Code.

ProductType_par

Type: Enum "trm Integration Product Type"

The product type of the specific product.

ProductNo_par

Type: Code[20]

The product no. of the specific product.

TempProductData_par

Type: Record "trm Temp Integration Product"

The Product Data in a temporary table

EXPORTPRODUCT()

Export product data for a specific master or item.

Syntax

```
ExportProduct(IntegrationSetupCode_par: Code[20], SystemId_par: Guid)
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

The Integration Setup Code.

SystemId_par

Type: Guid

The SystemId of the specific product.

EXPORTPRODUCT()

Export product data for a specific master or item returning the data.

Syntax

```
ExportProduct(IntegrationSetupCode_par: Code[20], SystemId_par: Guid, var  
TempProductData_par: Record "trm Temp Integration Product" temporary)
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

The Integration Setup Code.

SystemId_par

Type: Guid

The SystemId of the specific product.

TempProductData_par

Type: Record "trm Temp Integration Product"

The Product Data in a temporary table

TRACKEXPORTEDPRODUCTS()

Track Exported Products in Exported Products table.

Syntax

TrackExportedProducts(IntegrationSetupCode_par: Code[20], var TempProductData_par: Record "trm Temp Integration Product" temporary)

Parameters

IntegrationSetupCode_par

Type: Code[20]

TempProductData_par

Type: Record "trm Temp Integration Product"

TRACKEXPORTEDPRODUCT()

Track Exported Product in Exported Products table.

Syntax

TrackExportedProduct(IntegrationSetupCode_par: Code[20], ProductType_par: Enum "trm Integration Product Type", ProductNo_par: Code[20])

Parameters

IntegrationSetupCode_par

Type: Code[20]

ProductType_par

Type: Enum "trm Integration Product Type"

ProductNo_par

Type: Code[20]

TRACKEXPORTEDPRODUCT()

Track Exported Product from SystemId in Exported Products table.

Syntax

TrackExportedProduct(IntegrationSetupCode_par: Code[20], SystemId_par: Guid)

Parameters

IntegrationSetupCode_par

Type: Code[20]

SystemId_par

Type: Guid

GETCATEGORIES()

Get a list of categories with the option of including products.

Syntax

```
GetCategories(IncludeProducts_par: Boolean, var ProductBufferLine_par: Record "trm  
CPO Category Buffer Line" temporary)
```

Parameters

IncludeProducts_par

Type: Boolean

Include or not include product data.

ProductBufferLine_par

Type: Record "trm CPO Category Buffer Line"

A temporary table containing the category data (VAR declared)

EXPORTINVENTORIES()

Export all inventories.

Syntax

```
ExportInventories(IntegrationSetupCode_par: Code[20])
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

EXPORTINVENTORIES()

Export all inventories into a Data Container.

Syntax

```
ExportInventories(IntegrationSetupCode_par: Code[20], var DataContainer_par:  
Codeunit "trm Integration Data Container")
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

DataContainer_par

Type: Codeunit "trm Integration Data Container"

EXPORTINVENTORIES()

Export all inventories into the temporary Inventory table.

Syntax

```
ExportInventories(IntegrationSetupCode_par: Code[20], var TempInventoryData_par:  
Record "trm Temp Integration Inventory" temporary)
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

TempInventoryData_par

Type: Record "trm Temp Integration Inventory"

EXPORTINVENTORYPRODUCT()

Export inventory for a single product and location code.

Syntax

```
ExportInventoryProduct(IntegrationSetupCode_par: Code[20], ItemNo_par: Code[20],  
LocationCode_par: Code[10])
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

ItemNo_par

Type: Code[20]

LocationCode_par

Type: Code[10]

EXPORTINVENTORYPRODUCT()

Export inventory for a single product and location code into a Data Container

Syntax

```
ExportInventoryProduct(IntegrationSetupCode_par: Code[20], ItemNo_par: Code[20],  
LocationCode_par: Code[10], var DataContainer_par: Codeunit "trm Integration Data  
Container")
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

ItemNo_par

Type: Code[20]

LocationCode_par

Type: Code[10]

DataContainer_par

Type: Codeunit "trm Integration Data Container"

EXPORTINVENTORYPRODUCT()

Export inventory for a single product and location code into the temporary Inventory table.

Syntax

```
ExportInventoryProduct(IntegrationSetupCode_par: Code[20], ItemNo_par: Code[20],  
LocationCode_par: Code[10], TempInventoryData_par: Record "trm Temp Integration  
Inventory" temporary)
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

ItemNo_par

Type: Code[20]

LocationCode_par

Type: Code[10]

TempInventoryData_par

Type: Record "trm Temp Integration Inventory"

EXPORTITEMINVENTORIES()

Export non product based inventories (filtered) into the temporary Inventory table.

Syntax

```
ExportItemInventories(IntegrationSetupCode_par: Code[20], var  
TempItemInventoryData_par: Record "trm Temp Integration Product" temporary)
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

TempItemInventoryData_par

Type: Record "trm Temp Integration Product"

EXPORTITEMINVENTORIES()

Export inventory for a single product and location code into the temporary Inventory table.

Syntax

```
ExportItemInventories(IntegrationSetupCode_par: Code[20], ItemNo_par: Code[20],  
LocationCode_par: Code[10], TempItemInventoryData_par: Record "trm Temp  
Integration Product" temporary)
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

ItemNo_par

Type: Code[20]

LocationCode_par

Type: Code[10]

TempItemInventoryData_par

Type: Record "trm Temp Integration Product"

EXPORTPRICES()

Export a list of prices for the products.

Syntax

```
ExportPrices(IntegrationSetupCode_par: Code[20])
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

The Integration Setup Code.

EXPORTPRICES()

Export a list of prices for the products into a Data Container.

Syntax

```
ExportPrices(IntegrationSetupCode_par: Code[20], var DataContainer_par: Codeunit  
"trm Integration Data Container")
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

The Integration Setup Code.

DataContainer_par

Type: Codeunit "trm Integration Data Container"

The Data Container is a single instance data cache codeunit, where the exported data is persisted

EXPORTPRICES()

Export a list of prices for the products returning the data in the temporary Product table.

Syntax

```
ExportPrices(IntegrationSetupCode_par: Code[20], var TempProductData_par: Record  
"trm Temp Integration Product" temporary)
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

The Integration Setup Code.

TempProductData_par

Type: Record "trm Temp Integration Product"

The Product Data in a temporary table

EXPORTPRICESPRODUCT()

Export a list of prices for one product returning the data in the temporary Product table.

Syntax

```
ExportPricesProduct(IntegrationSetupCode_par: Code[20], ProductType_par: Enum "trm  
Integration Product Type", ProductNo_par: Code[20], var TempProductData_par:  
Record "trm Temp Integration Product" temporary)
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

The Integration Setup Code.

ProductType_par

Type: Enum "trm Integration Product Type"

ProductNo_par

Type: Code[20]

TempProductData_par

Type: Record "trm Temp Integration Product"

The Product Data in a temporary table

EXPORTCUSTOMERS()

Export a list of Customers.

Syntax

```
ExportCustomers(IntegrationSetupCode_par: Code[20])
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

The Integration Setup Code.

EXPORTCUSTOMERS()

Export a list of Customers using a Data Container.

Syntax

```
ExportCustomers(IntegrationSetupCode_par: Code[20], var DataContainer_par:  
Codeunit "trm Integration Data Container")
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

The Integration Setup Code.

DataContainer_par

Type: Codeunit "trm Integration Data Container"

The Data Container is a single instance data cache codeunit, where the exported data is persisted

EXPORTCUSTOMERS()

Export a list of Customers returning the data into a temporary Customer table.

Syntax

```
ExportCustomers(IntegrationSetupCode_par: Code[20], var TempCustomerData_par:  
Record "Customer" temporary)
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

The Integration Setup Code.

TempCustomerData_par

Type: Record "Customer"

The Customer Data in a temporary table

EXPORTCUSTOMER()

Export a Customer using a Data Container.

Syntax

```
ExportCustomer(IntegrationSetupCode_par: Code[20], CustomerNo_par: Code[20], var  
DataContainer_par: Codeunit "trm Integration Data Container")
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

The Integration Setup Code.

CustomerNo_par

Type: Code[20]

The Customer No. to return

DataContainer_par

Type: Codeunit "trm Integration Data Container"

The Data Container is a single instance data cache codeunit, where the exported data is persisted

EXPORTCUSTOMER()

Export a Customer returning the data into a temporary Customer table.

Syntax

```
ExportCustomer(IntegrationSetupCode_par: Code[20], CustomerNo_par: Code[20], var  
TempCustomerData_par: Record "Customer" temporary)
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

The Integration Setup Code.

CustomerNo_par

Type: Code[20]

The Customer No. to return

TempCustomerData_par

Type: Record "Customer"

The Customer Data in a temporary table

IMPORTSALESORDERS()

Import Sales Orders.

Syntax

```
ImportSalesOrders(IntegrationSetupCode_par: Code[20])
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

IMPORTSALESORDERS()

Import Sales Orders using a Data Container.

Syntax

```
ImportSalesOrders(IntegrationSetupCode_par: Code[20], var DataContainer_par:  
Codeunit "trm Integration Data Container")
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

DataContainer_par

Type: Codeunit "trm Integration Data Container"

IMPORTSALESORDERS()

Import Sales Orders using temporary Sales Document tables.

Syntax

```
ImportSalesOrders(IntegrationSetupCode_par: Code[20], var  
TempSalesImportJnlHeader_par: Record "trm Sales Import Jnl Header" temporary, var  
TempSalesImportJnlLine_par: Record "trm Sales Import Journal Line" temporary)
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

TempSalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

TempSalesImportJnlLine_par

Type: Record "trm Sales Import Journal Line"

IMPORTSALESINVOICES()

Import Sales Invoices.

Syntax

`ImportSalesInvoices(IntegrationSetupCode_par: Code[20])`

Parameters

IntegrationSetupCode_par

Type: Code[20]

IMPORTSALESINVOICES()

Import Sales Invoices using a Data Container.

Syntax

`ImportSalesInvoices(IntegrationSetupCode_par: Code[20], var DataContainer_par: Codeunit "trm Integration Data Container")`

Parameters

IntegrationSetupCode_par

Type: Code[20]

DataContainer_par

Type: Codeunit "trm Integration Data Container"

IMPORTSALESINVOICES()

Import Sales Invoices using temporary Sales Document tables.

Syntax

`ImportSalesInvoices(IntegrationSetupCode_par: Code[20], var TempSalesImportJnlHeader_par: Record "trm Sales Import Jnl Header" temporary, var TempSalesImportJnlLine_par: Record "trm Sales Import Journal Line" temporary)`

Parameters

IntegrationSetupCode_par

Type: Code[20]

TempSalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

TempSalesImportJnlLine_par

Type: Record "trm Sales Import Journal Line"

IMPORTSALESRETURNORDERS()

Import Sales Return Orders.

Syntax

`ImportSalesReturnOrders(IntegrationSetupCode_par: Code[20])`

Parameters

IntegrationSetupCode_par

Type: Code[20]

IMPORTSALESRETURNORDERS()

Import Sales Return Orders using a Data Container.

Syntax

```
ImportSalesReturnOrders(IntegrationSetupCode_par: Code[20], var DataContainer_par: Codeunit "trm Integration Data Container")
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

DataContainer_par

Type: Codeunit "trm Integration Data Container"

IMPORTSALESRETURNORDERS()

Import Sales Return Orders using temporary Sales Document tables.

Syntax

```
ImportSalesReturnOrders(IntegrationSetupCode_par: Code[20], var TempSalesImportJnlHeader_par: Record "trm Sales Import Jnl Header" temporary, var TempSalesImportJnlLine_par: Record "trm Sales Import Journal Line" temporary)
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

TempSalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

TempSalesImportJnlLine_par

Type: Record "trm Sales Import Journal Line"

IMPORTSALESCREDITMEMOS()

Import Sales Credit Memos.

Syntax

```
ImportSalesCreditMemos(IntegrationSetupCode_par: Code[20])
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

IMPORTSALESCREDITMEMOS()

Import Sales Credit Memos using a Data Container.

Syntax

```
ImportSalesCreditMemos(IntegrationSetupCode_par: Code[20], var DataContainer_par: Codeunit "trm Integration Data Container")
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

DataContainer_par

Type: Codeunit "trm Integration Data Container"

IMPORTSALESCREDITMEMOS()

Import Sales Credit Memos using temporary Sales Document tables.

Syntax

```
ImportSalesCreditMemos(IntegrationSetupCode_par: Code[20], var  
TempSalesImportJnlHeader_par: Record "trm Sales Import Jnl Header" temporary, var  
TempSalesImportJnlLine_par: Record "trm Sales Import Journal Line" temporary)
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

TempSalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

TempSalesImportJnlLine_par

Type: Record "trm Sales Import Journal Line"

CLEARTEMPSALESDOCUMENTS()

Clears and empties the temporary tables for Sales Documents.

Syntax

```
ClearTempSalesDocuments(var tempSalesImportJnlHeader_par: Record "trm Sales Import  
Jnl Header" temporary, var tempSalesImportJnlLine_par: Record "trm Sales Import  
Journal Line" temporary)
```

Parameters

tempSalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

tempSalesImportJnlLine_par

Type: Record "trm Sales Import Journal Line"

CLEARTEMPPOSTEDSALESDOCUMENTS()

Clears and empties the temporary tables for Posted Sales Documents.

Syntax

```
ClearTempPostedSalesDocuments(var tempSalesImportJnlHeader_par: Record "trm Sales  
Import Jnl Header" temporary, var tempSalesImportJnlLine_par: Record "trm Sales  
Import Journal Line" temporary, var tempIntegrationSalesTracking_par: Record "trm  
Temp Integration SaleTrack" temporary)
```

Parameters

tempSalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

tempSalesImportJnlLine_par

Type: Record "trm Sales Import Journal Line"

tempIntegrationSalesTracking_par

Type: Record "trm Temp Integration SaleTrack"

EXPORTSALESSHIPMENTS()

Export Sales Shipments.

Syntax

ExportSalesShipments(IntegrationSetupCode_par: Code[20])

Parameters

IntegrationSetupCode_par

Type: Code[20]

EXPORTSALESSHIPMENTS()

Export Posted Shipments using a Data Container.

Syntax

ExportSalesShipments(IntegrationSetupCode_par: Code[20], var DataContainer_par: Codeunit "trm Integration Data Container")

Parameters

IntegrationSetupCode_par

Type: Code[20]

DataContainer_par

Type: Codeunit "trm Integration Data Container"

EXPORTSALESSHIPMENTS()

Export Posted Shipments using the temporary Sales Document tables.

Syntax

ExportSalesShipments(IntegrationSetupCode_par: Code[20], var TempSalesImportJnlHeader_par: Record "trm Sales Import Jnl Header" temporary, var TempSalesImportJnlLine_par: Record "trm Sales Import Journal Line" temporary, var TempSalesTracking_par: Record "trm Temp Integration SaleTrack" temporary)

Parameters

IntegrationSetupCode_par

Type: Code[20]

TempSalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

TempSalesImportJnlLine_par

Type: Record "trm Sales Import Journal Line"

TempSalesTracking_par

Type: Record "trm Temp Integration SaleTrack"

EXPORTSALESSHIPMENTS()

Export Posted Shipments using temporary Sales Shipment tables.

Syntax

ExportSalesShipments(IntegrationSetupCode_par: Code[20], var TempSalesShipmentHeader_loc: Record "Sales Shipment Header" temporary, var TempSalesShipmentLine_loc: Record "Sales Shipment Line" temporary, var TempPortalOrderExtraInfo_loc: Record "trm Portal Order Extra Info" temporary)

Parameters

IntegrationSetupCode_par

Type: Code[20]

TempSalesShipmentHeader_loc

Type: Record "Sales Shipment Header"

TempSalesShipmentLine_loc

Type: Record "Sales Shipment Line"

TempPortalOrderExtraInfo_loc

Type: Record "trm Portal Order Extra Info"

EXPORTSALESINVOICES()

Export Posted Invoices.

Syntax

```
ExportSalesInvoices(IntegrationSetupCode_par: Code[20])
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

EXPORTSALESINVOICES()

Export Posted Invoices using a Data Container.

Syntax

```
ExportSalesInvoices(IntegrationSetupCode_par: Code[20], var DataContainer_par: Codeunit "trm Integration Data Container")
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

DataContainer_par

Type: Codeunit "trm Integration Data Container"

EXPORTSALESINVOICES()

Export Posted Invoices using the temporary Sales Document tables.

Syntax

```
ExportSalesInvoices(IntegrationSetupCode_par: Code[20], var TempSalesImportJnlHeader_par: Record "trm Sales Import Jnl Header" temporary, var TempSalesImportJnlLine_par: Record "trm Sales Import Journal Line" temporary, var TempSalesTracking_par: Record "trm Temp Integration SaleTrack" temporary)
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

TempSalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

TempSalesImportJnlLine_par

Type: Record "trm Sales Import Journal Line"

TempSalesTracking_par

Type: Record "trm Temp Integration SaleTrack"

EXPORTSALESINVOICES()

Export Posted Invoices using temporary Sales Invoice tables.

Syntax

```
ExportSalesInvoices(IntegrationSetupCode_par: Code[20], var  
TempSalesInvoiceHeader_loc: Record "Sales Invoice Header" temporary, var  
TempSalesInvoiceLine_loc: Record "Sales Invoice Line" temporary, var  
TempOrderExtraInfo_loc: Record "trm Portal Order Extra Info" temporary)
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

TempSalesInvoiceHeader_loc

Type: Record "Sales Invoice Header"

TempSalesInvoiceLine_loc

Type: Record "Sales Invoice Line"

TempOrderExtraInfo_loc

Type: Record "trm Portal Order Extra Info"

EXPORTSALESRETURNRECEIPTS()

Export Posted Return Receipts.

Syntax

```
ExportSalesReturnReceipts(IntegrationSetupCode_par: Code[20])
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

EXPORTSALESRETURNRECEIPTS()

Export Posted Return Receipts using a Data Container.

Syntax

```
ExportSalesReturnReceipts(IntegrationSetupCode_par: Code[20], var  
DataContainer_par: Codeunit "trm Integration Data Container")
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

DataContainer_par

Type: Codeunit "trm Integration Data Container"

EXPORTSALESRETURNRECEIPTS()

Export Posted Return Receipts using the temporary Sales Document tables.

Syntax

```
ExportSalesReturnReceipts(IntegrationSetupCode_par: Code[20], var  
TempSalesImportJnlHeader_par: Record "trm Sales Import Jnl Header" temporary, var  
TempSalesImportJnlLine_par: Record "trm Sales Import Journal Line" temporary, var  
TempSalesTracking_par: Record "trm Temp Integration SaleTrack" temporary)
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

TempSalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

TempSalesImportJnlLine_par

Type: Record "trm Sales Import Journal Line"

TempSalesTracking_par

Type: Record "trm Temp Integration SaleTrack"

EXPORTSALESRETURNRECEIPTS()

Export Posted Return Receipts using temporary Return Receipt tables.

Syntax

```
ExportSalesReturnReceipts(IntegrationSetupCode_par: Code[20], var  
TempSalesReturnReceiptHeader_par: Record "Return Receipt Header" temporary, var  
TempSalesReturnReceiptLine_par: Record "Return Receipt Line" temporary, var  
TempPortalOrderExtraInfo_par: Record "trm Portal Order Extra Info" temporary)
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

TempSalesReturnReceiptHeader_par

Type: Record "Return Receipt Header"

TempSalesReturnReceiptLine_par

Type: Record "Return Receipt Line"

TempPortalOrderExtraInfo_par

Type: Record "trm Portal Order Extra Info"

EXPORTSALESCREDITMEMOS()

Export Posted Credit Memos.

Syntax

```
ExportSalesCreditMemos(IntegrationSetupCode_par: Code[20])
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

EXPORTSALESCREDITMEMOS()

Export Posted Credit Memos using a Data Container.

Syntax

```
ExportSalesCreditMemos(IntegrationSetupCode_par: Code[20], var DataContainer_par:  
Codeunit "trm Integration Data Container")
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

DataContainer_par

Type: Codeunit "trm Integration Data Container"

EXPORTSALESCREDITMEMOS()

Export Posted Credit Memos the temporary Sales Document tables.

Syntax

```
ExportSalesCreditMemos(IntegrationSetupCode_par: Code[20], var  
TempSalesImportJnlHeader_par: Record "trm Sales Import Jnl Header" temporary, var  
TempSalesImportJnlLine_par: Record "trm Sales Import Journal Line" temporary, var  
TempSalesTracking_par: Record "trm Temp Integration SaleTrack" temporary)
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

TempSalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

TempSalesImportJnlLine_par

Type: Record "trm Sales Import Journal Line"

TempSalesTracking_par

Type: Record "trm Temp Integration SaleTrack"

EXPORTSALESCREDITMEMOS()

Export Posted Credit Memos using temporary Sales Credit Memo tables.

Syntax

```
ExportSalesCreditMemos(IntegrationSetupCode_par: Code[20], var  
TempSalesCrMemoHeader_par: Record "Sales Cr.Memo Header" temporary, var  
TempSalesCrMemoLine_par: Record "Sales Cr.Memo Line" temporary, var  
TempPortalOrderExtraInfo_par: Record "trm Portal Order Extra Info" temporary)
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

TempSalesCrMemoHeader_par

Type: Record "Sales Cr.Memo Header"

TempSalesCrMemoLine_par

Type: Record "Sales Cr.Memo Line"

TempPortalOrderExtraInfo_par

Type: Record "trm Portal Order Extra Info"

GETDEFAULTLOCATIONCODE()

Gets the default location from the integration setup.

Syntax

```
[Code[10]] := GetDefaultLocationCode()
```

Return

Code[10]

LocationCode

GETLOCATIONCODEWITHCHECK()

Gets the a location from the integration setup.

Syntax

```
[Code[10]] := GetLocationCodeWithCheck(SetLocationCode_par: Code[10])
```

Parameters

SetLocationCode_par

Type: Code[10]

Return

Code[10]

GETPRODUCTDESCRIPTIONS()

Get descriptions for a specific product.

Syntax

```
GetProductDescriptions(ProductType_par: Enum "trm Integration Product Type",  
ProductNo_par: Code[20], var TempProductData_par: Record "trm Temp Integration  
Product" temporary)
```

Parameters

ProductType_par

Type: Enum "trm Integration Product Type"

ProductNo_par

Type: Code[20]

TempProductData_par

Type: Record "trm Temp Integration Product"

GETPRODUCTDESCRIPTIONS()

Get descriptions for a specific product.

Syntax

```
GetProductDescriptions(var TempProductData_par: Record "trm Temp Integration  
Product" temporary)
```

Parameters

TempProductData_par

Type: Record "trm Temp Integration Product"

GETPRODUCTDIMENSIONS()

Get dimensions for a specific product.

Syntax

```
GetProductDimensions(ProductType_par: Enum "trm Integration Product Type",  
ProductNo_par: Code[20], var TempProductData_par: Record "trm Temp Integration  
Product" temporary)
```

Parameters

ProductType_par

Type: Enum "trm Integration Product Type"

ProductNo_par

Type: Code[20]

TempProductData_par

Type: Record "trm Temp Integration Product"

GETPRODUCTDIMENSIONS()

Get dimensions for a specific product.

Syntax

GetProductDimensions(var TempProductData_par: Record "trm Temp Integration Product" temporary)

Parameters

TempProductData_par

Type: Record "trm Temp Integration Product"

GETPRODUCTSTATISTICSGROUPS()

Get statistics groups for a specific product.

Syntax

GetProductStatisticsGroups(ProductType_par: Enum "trm Integration Product Type", ProductNo_par: Code[20], var TempProductData_par: Record "trm Temp Integration Product" temporary)

Parameters

ProductType_par

Type: Enum "trm Integration Product Type"

ProductNo_par

Type: Code[20]

TempProductData_par

Type: Record "trm Temp Integration Product"

GETPRODUCTSTATISTICSGROUPS()

Get statistics groups for a specific product.

Syntax

GetProductStatisticsGroups(var TempProductData_par: Record "trm Temp Integration Product" temporary)

Parameters

TempProductData_par

Type: Record "trm Temp Integration Product"

GETPRODUCTVARDIMS()

Get vardims for a specific product.

Syntax

GetProductVarDims(ProductType_par: Enum "trm Integration Product Type", ProductNo_par: Code[20], var TempProductData_par: Record "trm Temp Integration Product" temporary)

Parameters

ProductType_par

Type: Enum "trm Integration Product Type"

ProductNo_par

Type: Code[20]

TempProductData_par

Type: Record "trm Temp Integration Product"

GETPRODUCTVARDIMS()

Get vardims for a specific product.

Syntax

`GetProductVarDims(var TempProductData_par: Record "trm Temp Integration Product" temporary)`

Parameters

TempProductData_par

Type: Record "trm Temp Integration Product"

GETPRODUCTCOMPOSITIONS()

Get compositions for a specific product.

Syntax

`GetProductCompositions(ProductType_par: Enum "trm Integration Product Type", ProductNo_par: Code[20], var TempProductData_par: Record "trm Temp Integration Product" temporary)`

Parameters

ProductType_par

Type: Enum "trm Integration Product Type"

ProductNo_par

Type: Code[20]

TempProductData_par

Type: Record "trm Temp Integration Product"

GETPRODUCTCOMPOSITIONS()

Get compositions for a specific product.

Syntax

`GetProductCompositions(var TempProductData_par: Record "trm Temp Integration Product" temporary)`

Parameters

TempProductData_par

Type: Record "trm Temp Integration Product"

GETPRODUCTCARELABELS()

Get care labels for a specific product.

Syntax

`GetProductCarelabels(ProductType_par: Enum "trm Integration Product Type", ProductNo_par: Code[20], var TempProductData_par: Record "trm Temp Integration Product" temporary)`

Parameters

ProductType_par

Type: Enum "trm Integration Product Type"

ProductNo_par

Type: Code[20]

TempProductData_par

Type: Record "trm Temp Integration Product"

GETPRODUCTCARELABELS()

Get care labels for a specific product.

Syntax

```
GetProductCarelabels(var TempProductData_par: Record "trm Temp Integration Product" temporary)
```

Parameters

TempProductData_par

Type: Record "trm Temp Integration Product"

GETPRODUCTADDITIONALINFO()

Get additional information for a specific product.

Syntax

```
GetProductAdditionalInfo(ProductType_par: Enum "trm Integration Product Type",  
ProductNo_par: Code[20], var TempProductData_par: Record "trm Temp Integration Product" temporary)
```

Parameters

ProductType_par

Type: Enum "trm Integration Product Type"

ProductNo_par

Type: Code[20]

TempProductData_par

Type: Record "trm Temp Integration Product"

GETPRODUCTADDITIONALINFO()

Get additional information for a specific product.

Syntax

```
GetProductAdditionalInfo(var TempProductData_par: Record "trm Temp Integration Product" temporary)
```

Parameters

TempProductData_par

Type: Record "trm Temp Integration Product"

GETPRODUCTADDITIONALTAGS()

Get additional tags for a specific product.

Syntax

```
GetProductAdditionalTags(ProductType_par: Enum "trm Integration Product Type",  
ProductNo_par: Code[20], var TempProductData_par: Record "trm Temp Integration Product" temporary)
```

Parameters

ProductType_par

Type: Enum "trm Integration Product Type"

ProductNo_par

Type: Code[20]

TempProductData_par

Type: Record "trm Temp Integration Product"

GETPRODUCTADDITIONALTAGS()

Get additional tags for a specific product.

Syntax

```
GetProductAdditionalTags(var TempProductData_par: Record "trm Temp Integration Product" temporary)
```

Parameters

TempProductData_par

Type: Record "trm Temp Integration Product"

GETPRODUCTSUSTAINABILITY()

Get sustainability information for a specific product.

Syntax

```
GetProductSustainability(ProductType_par: Enum "trm Integration Product Type",  
ProductNo_par: Code[20], var TempProductData_par: Record "trm Temp Integration Product" temporary)
```

Parameters

ProductType_par

Type: Enum "trm Integration Product Type"

ProductNo_par

Type: Code[20]

TempProductData_par

Type: Record "trm Temp Integration Product"

GETPRODUCTSUSTAINABILITY()

Get sustainability information for a specific product.

Syntax

```
GetProductSustainability(var TempProductData_par: Record "trm Temp Integration Product" temporary)
```

Parameters

TempProductData_par

Type: Record "trm Temp Integration Product"

GETPRODUCTMEASUREMENTCHARTS()

Get measurement charts for a specific product.

Syntax

```
GetProductMeasurementCharts(ProductType_par: Enum "trm Integration Product Type",  
ProductNo_par: Code[20], var TempProductData_par: Record "trm Temp Integration Product" temporary)
```

Parameters

ProductType_par

Type: Enum "trm Integration Product Type"

ProductNo_par

Type: Code[20]

TempProductData_par

Type: Record "trm Temp Integration Product"

GETPRODUCTMEASUREMENTCHARTS()

Get measurement charts for a specific product.

Syntax

`GetProductMeasurementCharts(var TempProductData_par: Record "trm Temp Integration Product" temporary)`

Parameters

TempProductData_par

Type: Record "trm Temp Integration Product"

GETPRODUCTCOLLECTIONS()

Get related collections for a specific product.

Syntax

`GetProductCollections(ProductType_par: Enum "trm Integration Product Type", ProductNo_par: Code[20], var TempProductData_par: Record "trm Temp Integration Product" temporary)`

Parameters

ProductType_par

Type: Enum "trm Integration Product Type"

ProductNo_par

Type: Code[20]

TempProductData_par

Type: Record "trm Temp Integration Product"

GETPRODUCTCOLLECTIONS()

Get related collections for a specific product.

Syntax

`GetProductCollections(var TempProductData_par: Record "trm Temp Integration Product" temporary)`

Parameters

TempProductData_par

Type: Record "trm Temp Integration Product"

GETPRODUCTPRICES()

Get sales prices for a specific product.

Syntax

`GetProductPrices(ProductType_par: Enum "trm Integration Product Type", ProductNo_par: Code[20], var TempProductData_par: Record "trm Temp Integration Product" temporary)`

Parameters

ProductType_par

Type: Enum "trm Integration Product Type"

ProductNo_par

Type: Code[20]

TempProductData_par

Type: Record "trm Temp Integration Product"

GETPRODUCTPRICES()

Get sales prices for a specific product.

Syntax

```
GetProductPrices(var TempProductData_par: Record "trm Temp Integration Product" temporary)
```

Parameters

TempProductData_par

Type: Record "trm Temp Integration Product"

GETPRODUCTITEMS()

Get related items for a specific product (only master).

Syntax

```
GetProductItems(ProductType_par: Enum "trm Integration Product Type",  
ProductNo_par: Code[20], var TempProductData_par: Record "trm Temp Integration Product" temporary)
```

Parameters

ProductType_par

Type: Enum "trm Integration Product Type"

ProductNo_par

Type: Code[20]

TempProductData_par

Type: Record "trm Temp Integration Product"

GETPRODUCTITEMS()

Get related items for a specific product (only master).

Syntax

```
GetProductItems(var TempProductData_par: Record "trm Temp Integration Product" temporary)
```

Parameters

TempProductData_par

Type: Record "trm Temp Integration Product"

GETPRODUCTITEMATTRIBUTES()

Get item attributes for a specific product.

Syntax

```
GetProductItemAttributes(ProductType_par: Enum "trm Integration Product Type",  
ProductNo_par: Code[20], var TempProductData_par: Record "trm Temp Integration Product" temporary)
```

Parameters

ProductType_par

Type: Enum "trm Integration Product Type"

ProductNo_par

Type: Code[20]

TempProductData_par

Type: Record "trm Temp Integration Product"

GETPRODUCTITEMATTRIBUTES()

Get item attributes for a specific product.

Syntax

```
GetProductItemAttributes(var TempProductData_par: Record "trm Temp Integration Product" temporary)
```

Parameters

TempProductData_par

Type: Record "trm Temp Integration Product"

GETPRODUCTIMAGES()

Get related images for a specific product.

Syntax

```
GetProductImages(ProductType_par: Enum "trm Integration Product Type",  
ProductNo_par: Code[20], var TempProductData_par: Record "trm Temp Integration Product" temporary)
```

Parameters

ProductType_par

Type: Enum "trm Integration Product Type"

ProductNo_par

Type: Code[20]

TempProductData_par

Type: Record "trm Temp Integration Product"

GETPRODUCTIMAGES()

Get related images for a specific product.

Syntax

```
GetProductImages(var TempProductData_par: Record "trm Temp Integration Product" temporary)
```

Parameters

TempProductData_par

Type: Record "trm Temp Integration Product"

GETTABLEDATA()

Get table data for a specific product.

Syntax

```
GetTableData(var TempIntegrationData_par: Record "trm Temp Integration Data")
```

temporary)

Parameters

TempIntegrationData_par

Type: Record "trm Temp Integration Data"

GETINTEGRATIONPRODUCTFROMFILTER()

Get ProductType and ProductNo from a filter on Integration Product table.

Syntax

```
GetIntegrationProductFromFilter(var IntegrationProduct_par: Record "trm Temp  
Integration Product", var ProductType_par: Enum "trm Integration Product Type",  
var ProductNo_par: Code[20])
```

Parameters

IntegrationProduct_par

Type: Record "trm Temp Integration Product"

ProductType_par

Type: Enum "trm Integration Product Type"

ProductNo_par

Type: Code[20]

GETINTEGRATIONPRODUCTFROMFILTER()

return Product Type and Product No in the Integration Product table from a filter on the same table.

Syntax

```
GetIntegrationProductFromFilter(var IntegrationProduct_par: Record "trm Temp  
Integration Product")
```

Parameters

IntegrationProduct_par

Type: Record "trm Temp Integration Product"

COPYINTEGRATIONPRODUCT()

Copies one or more Integration Product records.

Syntax

```
CopyIntegrationProduct(var FromIntegrationProduct_par: Record "trm Temp  
Integration Product", var ToIntegrationProduct_par: Record "trm Temp Integration  
Product", ClearTarget_par: Boolean)
```

Parameters

FromIntegrationProduct_par

Type: Record "trm Temp Integration Product"

ToIntegrationProduct_par

Type: Record "trm Temp Integration Product"

ClearTarget_par

Type: Boolean

CHECKPRODUCTEXPORTALLOWED()

Checks if product export is allowed on the Integration Setup. If not allowed, it will give an error.

Syntax

CheckProductExportAllowed()

CheckInventoryExportAllowed()

Checks if inventory export is allowed on the Integration Setup. If not allowed, it will give an error.

Syntax

CheckInventoryExportAllowed()

CHECKCUSTOMEREXPORTALLOWED()

Checks if Customer export is enabled on the Integration Setup. If not enabled, it will give an error.

Syntax

CheckCustomerExportAllowed()

CHECKSALESQUOTEIMPORTALLOWED()

Checks if sales quote import is allowed on the Integration Setup. If not allowed, it will give an error.

Syntax

CheckSalesQuoteImportAllowed()

CHECKSALESORDERIMPORTALLOWED()

Checks if sales order import is allowed on the Integration Setup. If not allowed, it will give an error.

Syntax

CheckSalesOrderImportAllowed()

CHECKSALESINVOICEIMPORTALLOWED()

Checks if sales invoice import is allowed on the Integration Setup. If not allowed, it will give an error.

Syntax

CheckSalesInvoiceImportAllowed()

CHECKSALESCREDITMEMOIMPORTALLOWED()

Checks if sales credit memo import is allowed on the Integration Setup. If not allowed, it will give an error.

Syntax

CheckSalesCreditMemoImportAllowed()

CHECKSALESRETURNORDERIMPORTALLOWED()

Checks if sales return order import is allowed on the Integration Setup. If not allowed, it will give an error.

Syntax

CheckSalesReturnOrderImportAllowed()

CHECKPOSTEDSALESSHIPMENTEXPORTALLOWED()

Checks if sales shipment export is allowed on the Integration Setup. If not allowed, it will give an error.

Syntax

CheckPostedSalesShipmentExportAllowed()

CHECKPOSTEDSALESINVOICEEXPORTALLOWED()

Checks if sales invoice export is allowed on the Integration Setup. If not allowed, it will give an error.

Syntax

CheckPostedSalesInvoiceExportAllowed()

CHECKPOSTEDSALESRETURNSHIPMENTEXPORTALLOWED()

Checks if sales return shipment export is allowed on the Integration Setup. If not allowed, it will give an error.

Syntax

CheckPostedSalesReturnShipmentExportAllowed()

CheckPostedSalesCreditMemoExportAllowed()

Checks if sales credit memo export is allowed on the Integration Setup. If not allowed, it will give an error.

Syntax

CheckPostedSalesCreditMemoExportAllowed()

GETCODE10FROMTEXT20()

Validates and change the Value_par from Text[20] to Code[10] characters. Useable in TRIMIT because many relations are based on Text[20] fields eventhough code only has a max length of 10.

Syntax

[Code[10]] := GetCode10FromText20(Value_par: Text[20])

Parameters

Value_par

Type: Text[20]

The text value from a Text[20] variable or field.

Return

Code[10]

Return value as a valid Code[10] value.

GETCODE10FROMCODE20()

Validates and change the Value_par from 20 to 10 characters. Useable in TRIMIT because various table relations are based on Code[20] fields eventhough the used code only has a max length of 10.

Syntax

[Code[10]] := GetCode10FromCode20(Value_par: Code[20])

Parameters

Value_par

Type: Code[20]

The code from a Code[20] variable or field.

Return

Code[10]

Return code as a valid Code[10] value.

GETCODE10FROMCODE40()

Validates and change the Value_par from 40 to 10 characters. Useable in TRIMIT because various table relations are based on Code[40] fields eventhough the used code only has a max length of 10.

Syntax

```
[Code[10]] := GetCode10FromCode40(Value_par: Code[40])
```

Parameters

Value_par

Type: Code[40]

The code from a Code[40] variable or field.

Return

Code[10]

Return code as a valid Code[10] value.

GETCODE20FROMCODE30()

Validates and change the Value_par from 30 to 20 characters.

Syntax

```
[Code[20]] := GetCode20FromCode30(Value_par: Code[30])
```

Parameters

Value_par

Type: Code[30]

The code from a Code[30] variable or field.

Return

Code[20]

Return code as a valid Code[20] value.

GETCODE20FROMCODE35()

Validates and change the Value_par from 35 to 20 characters.

Syntax

```
[Code[20]] := GetCode20FromCode35(Value_par: Code[35])
```

Parameters

Value_par

Type: Code[35]

The code from a Code[35] variable or field.

Return

Code[20]

Return code as a valid Code[20] value.

FINDINTEGRATIONSETUPCODE()

Finds the Integration Setup Code related to a specific User ID.

Syntax

```
[Code[20]] := FindIntegrationSetupCode(UserID_par: Code[50])
```

Parameters

UserID_par

Type: Code[50]

The User ID used to search for the Integration Setup Code. Use blank for Default

Return

Code[20]

The Integration Setup Code.

SETINTEGRATIONSETUP()

Validates and sets the Integration Setup as a global variable used in this codeunits procedures.

Syntax

```
SetIntegrationSetup(IntegrationSetupCode_par: Code[20])
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

The Integration Setup Code.

PF_ONAFTERISSALEALLOWEDCHECK()

Integration Event that can be used to alter the return value of the procedure `IsSaleAllowedCheck()`. This event

is triggered right before returning the value in the procedure `IsSaleAllowedCheck()`.

Syntax

```
pf_OnAfterIsSaleAllowedCheck(IntegrationSetupCode_par: Code[20], var  
ReturnValue_par: Boolean)
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

The Integration Setup Code.

ReturnValue_par

Type: Boolean

The value returned in the function `IsSaleAllowedCheck`.

PF_ONAFTERGENERATEPRODUCTLIST()

Integration Event that can be used to alter the product list generated in the procedure `GenerateProductList()`.

This event is triggered as the last Line in the procedure `GenerateProductList()`.

Syntax

```
pf_OnAfterGenerateProductList(IntegrationSetupCode_par: Code[20])
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

The Integration Setup Code.

PF_ONAFTERGETPRODUCTLIST()

Syntax

```
pf_OnAfterGetProductList(IncludeDetails_par: Boolean, var TempProductData_par: Record "trm Temp Integration Product" temporary)
```

Parameters

IncludeDetails_par

Type: Boolean

TempProductData_par

Type: Record "trm Temp Integration Product"

PF_ONAFTERGETPRODUCTDETAILS()

Syntax

```
pf_OnAfterGetProductDetails(var TempProductData_par: Record "trm Temp Integration Product" temporary)
```

Parameters

TempProductData_par

Type: Record "trm Temp Integration Product"

PF_ONAFTERGETEXTENDEDDESCRIPTION()

Syntax

```
pf_OnAfterGetExtendedDescription(ItemNo_par: Code[20], LanguageCode_par: Code[10], var ExtendedText_par: Text)
```

Parameters

ItemNo_par

Type: Code[20]

LanguageCode_par

Type: Code[10]

ExtendedText_par

Type: Text

PF_ONAFTERGETDESCRIPTION()

Syntax

```
pf_OnAfterGetDescription(ItemNo_par: Code[20], LanguageCode_par: Code[10], var Description_par: Text[100], var Description2_par: Text[50])
```

Parameters

ItemNo_par

Type: Code[20]

LanguageCode_par

Type: Code[10]

Description_par

Type: Text[100]

Description2_par

Type: Text[50]

PF_ONAFTERGETPRICE()

Syntax

pf_OnAfterGetPrice(ItemNo_par: Code[20], CustomerPriceGroup_par: Code[10], CurrencyCode_par: Code[10], var Price_par: Decimal, var PriceFound_par: Boolean)

Parameters

ItemNo_par

Type: Code[20]

CustomerPriceGroup_par

Type: Code[10]

CurrencyCode_par

Type: Code[10]

Price_par

Type: Decimal

PriceFound_par

Type: Boolean

PF_ONAFTERGETEAN()

Syntax

pf_OnAfterGetEAN(ItemNo_par: Code[20], var EAN_par: Code[50])

Parameters

ItemNo_par

Type: Code[20]

EAN_par

Type: Code[50]

PF_ONAFTERGETGTIN()

Syntax

pf_OnAfterGetGTIN(ItemNo_par: Code[20], var GTIN_par: Code[14])

Parameters

ItemNo_par

Type: Code[20]

GTIN_par

Type: Code[14]

PF_ONAFTERGETINVENTORIES()

Syntax

pf_OnAfterGetInventories(var TempInventoryData_par: Record "trm Temp Integration Inventory" temporary)

Parameters

TempInventoryData_par

Type: Record "trm Temp Integration Inventory"

PF_ONAFTERGETINVENTORY()

Syntax

```
pf_OnAfterGetInventory(var TempInventoryData_par: Record "trm Temp Integration Inventory" temporary)
```

Parameters

TempInventoryData_par

Type: Record "trm Temp Integration Inventory"

PF_ONAFTERGETITEMINVENTORIES()

Syntax

```
pf_OnAfterGetItemInventories(var TempItemInventoryData_par: Record "trm Temp Integration Product" temporary)
```

Parameters

TempItemInventoryData_par

Type: Record "trm Temp Integration Product"

PF_ONAFTERCALCULATEINVENTORY()

Syntax

```
pf_OnAfterCalculateInventory(ItemNo_par: Code[20], LocationCode_par: Code[10], var AvailableQty_par: Decimal)
```

Parameters

ItemNo_par

Type: Code[20]

LocationCode_par


Type: Code[10]

AvailableQty_par

Type: Decimal

APPENDIX 2: CODEUNIT 6036862

You can also find Documentation to help you in the AL Code itself of Codeunit **6036862 trm Integration Sales Handling** before all the Procedures. I.e.,

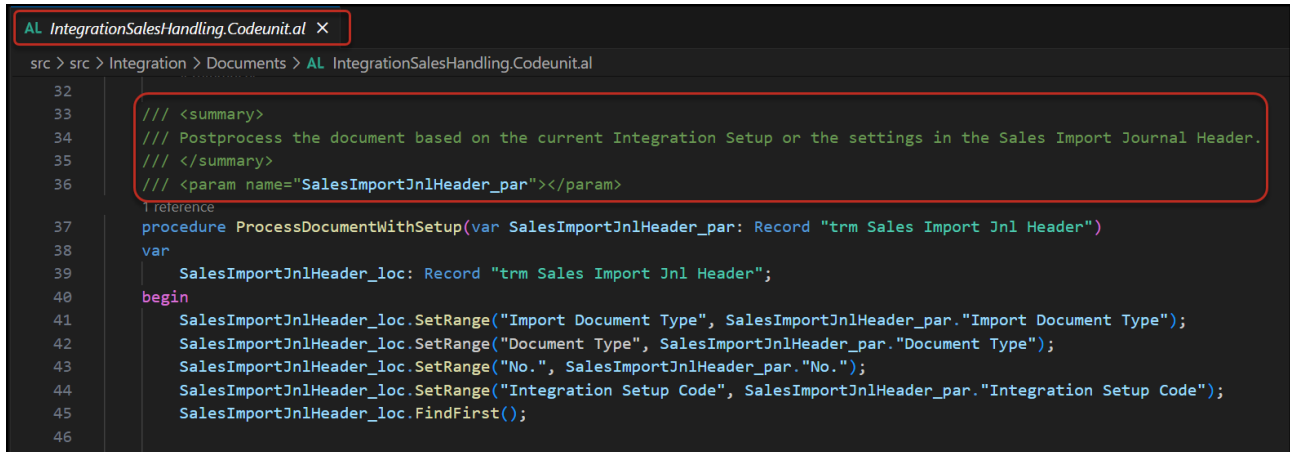

```

32
33
34  /// <summary>
35  /// Postprocess the document based on the current Integration Setup or the settings in the Sales Import Journal Header.
36  /// </summary>
37  /// <param name="SalesImportJnlHeader_par"></param>
38  | reference
39  procedure ProcessDocumentWithSetup(var SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header")
40  var
41      SalesImportJnlHeader_loc: Record "trm Sales Import Jnl Header";
42  begin
43      SalesImportJnlHeader_loc.SetRange("Import Document Type", SalesImportJnlHeader_par."Import Document Type");
44      SalesImportJnlHeader_loc.SetRange("Document Type", SalesImportJnlHeader_par."Document Type");
45      SalesImportJnlHeader_loc.SetRange("No.", SalesImportJnlHeader_par."No.");
46      SalesImportJnlHeader_loc.SetRange("Integration Setup Code", SalesImportJnlHeader_par."Integration Setup Code");
47      SalesImportJnlHeader_loc.FindFirst();
48

```

The following of this **Appendix 2** is an overview of all the documentation in this Codeunit.

PROCESSDOCUMENTWITHSETUP()

Postprocess the document based on the current Integration Setup or the settings in the Sales Import Journal Header.

Syntax

ProcessDocumentWithSetup(var SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header")

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

REVERSEDOCUMENTWITHCHECK()

Reverse the document based on the current Integration Setup and return it in the temporary tables. If the document has been reversed, the temp tables will contain the reversed document otherwise they will be empty. If the Integration Setup is not set for reversal an error will be raised if the document has wrong sign on total.

Syntax

ReverseDocumentWithCheck(var SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header", var TempSalesImportJnlHeader_par: Record "trm Sales Import Jnl Header" temporary, var TempSalesImportJnlLine_par: Record "trm Sales Import Journal Line" temporary)

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

TempSalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

TempSalesImportJnlLine_par

Type: Record "trm Sales Import Journal Line"

REVERSEDOCUMENT()

Syntax

```
ReverseDocument(var SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header", NewDocumentType_par: Enum "Sales Document Type", DocumentAmount_par: Decimal, var TempSalesImportJnlHeader_par: Record "trm Sales Import Jnl Header" temporary, var TempSalesImportJnlLine_par: Record "trm Sales Import Journal Line" temporary)
```

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

NewDocumentType_par

Type: Enum "Sales Document Type"

DocumentAmount_par

Type: Decimal

TempSalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

TempSalesImportJnlLine_par

Type: Record "trm Sales Import Journal Line"

REVERSEDOCUMENTLINES()

Syntax

```
ReverseDocumentLines(SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header", NewDocumentType_par: Enum "Sales Document Type", DocumentAmount_par: Decimal, var TempSalesImportJnlLine_par: Record "trm Sales Import Journal Line" temporary)
```

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

NewDocumentType_par

Type: Enum "Sales Document Type"

DocumentAmount_par

Type: Decimal

TempSalesImportJnlLine_par

Type: Record "trm Sales Import Journal Line"

PROCESSDOCUMENT()

Postprocess the document.

Syntax

```
ProcessDocument(var SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header")
```

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

PROCESSDOCUMENT()

Postprocess the document based on the function parameter.

Syntax

```
ProcessDocument(var SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header", ReleaseDocument_par: Boolean)
```

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

ReleaseDocument_par

Type: Boolean

PROCESSDOCUMENT()

Postprocess the document based on the function parameters.

Syntax

```
ProcessDocument(var SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header", ReleaseDocument_par: Boolean, PostDocument_par: Boolean)
```

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

ReleaseDocument_par

Type: Boolean

PostDocument_par

Type: Boolean

PROCESSDOCUMENT()

Postprocess the document based on the function parameters.

Syntax

```
ProcessDocument(var SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header", ReleaseDocument_par: Boolean, CreatePayment_par: Boolean, PostDocument_par: Boolean)
```

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

ReleaseDocument_par

Type: Boolean

CreatePayment_par

Type: Boolean

PostDocument_par

Type: Boolean

PROCESSDOCUMENT()

Postprocess the document based on the function parameters.

Syntax

```
ProcessDocument(var SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header", ReleaseDocument_par: Boolean, CreatePickDoc_par: Boolean, CreatePayment_par: Boolean, PostDocument_par: Boolean)
```

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

ReleaseDocument_par

Type: Boolean

CreatePickDoc_par

Type: Boolean

CreatePayment_par

Type: Boolean

PostDocument_par

Type: Boolean

CREATEDOCUMENT()

Creates a document from the Sales Import Journal Header tables

Syntax

```
CreateDocument(var SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header")
```

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

SETDOCUMENTNOANDSERIES()

Sets the No., Internal No. and the No. Series (if applicable) in the Sales Import Journal Header table.

Syntax

```
SetDocumentNoAndSeries(var salesImportJnlHeader_par: Record "trm Sales Import Jnl Header")
```

Parameters

salesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

CREATEJOURNAL()

Creates a General Journal from the Sales Import Journal Header table.

Syntax

```
CreateJournal(var SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header")
```

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

CREATEDOCJOURNAL()

Syntax

CreateDocJournal(var SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header")

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

RELEASEDOCUMENT()

Releases the document referred in the Sales Import Journal Header.

Syntax

ReleaseDocument(var SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header")

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

CREATEPICKDOCFROMORDER()

Creates a Pick Document based on the Sales Order referred in the Sales Import Journal Header.

Syntax

CreatePickDocFromOrder(var SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header")

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

CREATEORDERFROMQUOTE()

Creates a Sales Order from the Sales Quote referred in the Sales Import Journal Header.

Syntax

CreateOrderFromQuote(var SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header")

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

CREATEINVOICEFROMQUOTE()

Creates a Sales Invoice from the Sales Quote referred in the Sales Import Journal Header.

Syntax

CreateInvoiceFromQuote(var SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header")

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

CREATEPAYMENT()

Creates a Payment on the document referred in the Sales Import Journal Header.

Syntax

```
CreatePayment(var SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header")
```

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

POSTDOCUMENT()

Post the document referred in the Sales Import Journal Header.

Syntax

```
PostDocument(var SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header")
```

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

POSTDOCUMENTJOURNAL()

Post the General Journal line referred in the Sales Import Journal Header.

Syntax

```
PostDocumentJournal(var SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header")
```

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

POSTDOCWITHJOURNAL()

Syntax

```
PostDocWithJournal(var SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header")
```

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

SETINVOICEEXPORTEDSTATUS()

Syntax

```
SetInvoiceExportedStatus(InvoiceNo_par: Code[20], Value_par: Boolean)
```

Parameters

InvoiceNo_par

Type: Code[20]

Value_par

Type: Boolean

SETSALESINVOICEEXPORTEDSTATUS()

Set the Exported flag on the Invoice with a confirmation dialog if ConfirmDialog is set.

Syntax

```
SetSalesInvoiceExportedStatus(IntegrationSetupCode_par: Code[20], InvoiceNo_par: Code[20], Value_par: Boolean, ConfirmDialog_par: Boolean)
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

InvoiceNo_par

Type: Code[20]

Value_par

Type: Boolean

ConfirmDialog_par

Type: Boolean

SETCREDITMEMOEXPORTEDSTATUS()

Syntax

```
SetCreditMemoExportedStatus(CreditMemoNo_par: Code[20], Value_par: Boolean)
```

Parameters

CreditMemoNo_par

Type: Code[20]

Value_par

Type: Boolean

SETSALESCREDITMEMOEXPORTEDSTATUS()

Set the Exported flag on the Credit Memo with a confirmation dialog if ConfirmDialog is set.

Syntax

```
SetSalesCreditMemoExportedStatus(IntegrationSetupCode_par: Code[20], CreditMemoNo_par: Code[20], Value_par: Boolean, ConfirmDialog_par: Boolean)
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

CreditMemoNo_par

Type: Code[20]

Value_par

Type: Boolean

ConfirmDialog_par

Type: Boolean

SETSHIPMENTEXPORTEDSTATUS()

Syntax

```
SetShipmentExportedStatus(ShipmentNo_par: Code[20], Value_par: Boolean)
```

Parameters

ShipmentNo_par

Type: Code[20]

Value_par

Type: Boolean

SETSALESSHIPMENTEXPORTEDSTATUS()

Set the Exported flag on the Shipment with a confirmation dialog if ConfirmDialog is set.

Syntax

SetSalesShipmentExportedStatus(IntegrationSetupCode_par: Code[20], ShipmentNo_par: Code[20], Value_par: Boolean, ConfirmDialog_par: Boolean)

Parameters

IntegrationSetupCode_par

Type: Code[20]

ShipmentNo_par

Type: Code[20]

Value_par

Type: Boolean

ConfirmDialog_par

Type: Boolean

SETRETURNRECEIPTEXPORTEDSTATUS()

Syntax

SetReturnReceiptExportedStatus(ReturnShipmentNo_par: Code[20], Value_par: Boolean)

Parameters

ReturnShipmentNo_par

Type: Code[20]

Value_par

Type: Boolean

SETSALESRETURNRECEIPTEXPORTEDSTATUS()

Set the Exported flag on the Return Shipment with a confirmation dialog if ConfirmDialog is set.

Syntax

SetSalesReturnReceiptExportedStatus(IntegrationSetupCode_par: Code[20], ReturnShipmentNo_par: Code[20], Value_par: Boolean, ConfirmDialog_par: Boolean)

Parameters

IntegrationSetupCode_par

Type: Code[20]

ReturnShipmentNo_par

Type: Code[20]

Value_par

Type: Boolean

ConfirmDialog_par

Type: Boolean

ISDOCUMENTNOUSED()

Check to see if the current Document No. has already been used.

Syntax

```
[Boolean] := IsDocumentNoUsed(var SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header", Silent_par: Boolean)
```

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

Silent_par

Type: Boolean

Return

Boolean

ISDOCUMENTCREATED()

Check whether the document has already been imported and return true if it is imported, otherwise false. The function will raise an error based on the ThrowError flag.

Syntax

```
[Boolean] := IsDocumentCreated(var SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header", Silent_par: Boolean)
```

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

Silent_par

Type: Boolean

Return

Boolean

HASSELLTOINFO()

Returns true if the document has Seller customer and address information filled.

Syntax

```
[Boolean] := HasSellToInfo(SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header")
```

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

Return

Boolean

HASBILLTOINFO()

Returns true if the document has Billing customer and address information filled.

Syntax

```
[Boolean] := HasBillToInfo(SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header")
```

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

Return

Boolean

HASSHIPTOINFO()

Returns true if the document has Shipping customer and address information filled.

Syntax

```
[Boolean] := HasShipToInfo(SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header")
```

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

Return

Boolean

CREATEORDEREXTRAINFO()

Create Extra Order Information from the referred Sales Import Journal Header.

Syntax

```
CreateOrderExtraInfo(SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header")
```

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

CREATEORDEREXTRAINFO()

Create Extra Order Information from the referred Sales Import Journal Header and return it in a temporary

OrderExtraInfo record.

Syntax

```
CreateOrderExtraInfo(var salesImportJnlHeader_par: Record "trm Sales Import Jnl Header", var orderExtraInfo_par: Record "trm Portal Order Extra Info" temporary)
```

Parameters

salesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

orderExtraInfo_par

Type: Record "trm Portal Order Extra Info"

GETINTEGRATIONITEMWITHCHECK()

Finds the Type and No. of an Integration Item. Raises an error if the Integration Item does not exist.

Syntax

```
GetIntegrationItemWithCheck(IntegrationItemNo_par: Code[20],  
CountryRegionCode_par: Code[10], var Type_par: Enum "trm Integration Setup  
LineType", var No_par: Code[20])
```

Parameters

IntegrationItemNo_par

Type: Code[20]

CountryRegionCode_par

Type: Code[10]

Type_par

Type: Enum "trm Integration Setup LineType"

No_par

Type: Code[20]

GETINTEGRATIONITEM()

Finds the Type and No. of an Integration Item. Returns true if the Integration Item exist.

Syntax

```
[Boolean] := GetIntegrationItem(IntegrationItemNo_par: Code[20],  
CountryRegionCode_par: Code[10], var Type_par: Enum "trm Integration Setup  
LineType", var No_par: Code[20])
```

Parameters

IntegrationItemNo_par

Type: Code[20]

CountryRegionCode_par

Type: Code[10]

Type_par

Type: Enum "trm Integration Setup LineType"

No_par

Type: Code[20]

Return

Boolean

GETSHIPMENTS()

Export Posted Shipments using temporary Sales Shipment tables.

Syntax

```
GetShipments(var TempSalesShipmentHeader_par: Record "Sales Shipment Header"  
temporary, var TempSalesShipmentLine_par: Record "Sales Shipment Line" temporary,  
var TempPortalOrderExtraInfo_par: Record "trm Portal Order Extra Info" temporary)
```

Parameters

TempSalesShipmentHeader_par

Type: Record "Sales Shipment Header"

TempSalesShipmentLine_par

Type: Record "Sales Shipment Line"

TempPortalOrderExtraInfo_par

Type: Record "trm Portal Order Extra Info"

GETSHIPMENTS()

Export Posted Shipments using the temporary Sales Document tables.

Syntax

```
GetShipments(var TempSalesImportJnlHeader_par: Record "trm Sales Import Jnl Header" temporary, var TempSalesImportJnlLine_par: Record "trm Sales Import Journal Line" temporary, var TempSalesTracking_par: Record "trm Temp Integration SaleTrack" temporary)
```

Parameters

TempSalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

TempSalesImportJnlLine_par

Type: Record "trm Sales Import Journal Line"

TempSalesTracking_par

Type: Record "trm Temp Integration SaleTrack"

GETINVOICES()

Export Posted Invoices using temporary Sales Invoice tables.

Syntax

```
GetInvoices(var TempSalesInvoiceHeader_par: Record "Sales Invoice Header" temporary, var TempSalesInvoiceLine_par: Record "Sales Invoice Line" temporary, var TempPortalOrderExtraInfo_par: Record "trm Portal Order Extra Info" temporary)
```

Parameters

TempSalesInvoiceHeader_par

Type: Record "Sales Invoice Header"

TempSalesInvoiceLine_par

Type: Record "Sales Invoice Line"

TempPortalOrderExtraInfo_par

Type: Record "trm Portal Order Extra Info"

GETINVOICES()

Export Posted Invoices using the temporary Sales Document tables.

Syntax

```
GetInvoices(var TempSalesImportJnlHeader_par: Record "trm Sales Import Jnl Header" temporary, var TempSalesImportJnlLine_par: Record "trm Sales Import Journal Line" temporary, var TempSalesTracking_par: Record "trm Temp Integration SaleTrack" temporary)
```

Parameters

TempSalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

TempSalesImportJnlLine_par

Type: Record "trm Sales Import Journal Line"

TempSalesTracking_par

Type: Record "trm Temp Integration SaleTrack"

GETRETURNRECEIPTS()

Export Posted Return Receipts using temporary Return Receipt tables.

Syntax

```
GetReturnReceipts(var TempReturnReceiptHeader_par: Record "Return Receipt Header"
temporary, var TempReturnReceiptLine_par: Record "Return Receipt Line" temporary,
var TempOrderExtraInfo_par: Record "trm Portal Order Extra Info" temporary)
```

Parameters

TempReturnReceiptHeader_par

Type: Record "Return Receipt Header"

TempReturnReceiptLine_par

Type: Record "Return Receipt Line"

TempOrderExtraInfo_par

Type: Record "trm Portal Order Extra Info"

GETRETURNRECEIPTS()

Export Posted Return Receipts using the temporary Sales Document tables.

Syntax

```
GetReturnReceipts(var TempSalesImportJnlHeader_par: Record "trm Sales Import Jnl
Header" temporary, var TempSalesImportJnlLine_par: Record "trm Sales Import
Journal Line" temporary, var TempSalesTracking_par: Record "trm Temp Integration
SaleTrack" temporary)
```

Parameters

TempSalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

TempSalesImportJnlLine_par

Type: Record "trm Sales Import Journal Line"

TempSalesTracking_par

Type: Record "trm Temp Integration SaleTrack"

GETCREDITMEMOS()

Export Posted Credit Memos using temporary Sales Credit Memo tables.

Syntax

```
GetCreditMemos(var TempSalesCrMemoHeader_par: Record "Sales Cr.Memo Header"
temporary, var TempSalesCrMemoLine_par: Record "Sales Cr.Memo Line" temporary, var
TempPortalOrderExtraInfo_par: Record "trm Portal Order Extra Info" temporary)
```

Parameters

TempSalesCrMemoHeader_par

Type: Record "Sales Cr.Memo Header"

TempSalesCrMemoLine_par

Type: Record "Sales Cr.Memo Line"

TempPortalOrderExtraInfo_par

Type: Record "trm Portal Order Extra Info"

GETCREDITMEMOS()

Export Posted Credit Memos the temporary Sales Document tables.

Syntax

```
GetCreditMemos(var TempSalesImportJnlHeader_par: Record "trm Sales Import Jnl Header" temporary, var TempSalesImportJnlLine_par: Record "trm Sales Import Journal Line" temporary, var TempSalesTracking_par: Record "trm Temp Integration SaleTrack" temporary)
```

Parameters

TempSalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

TempSalesImportJnlLine_par

Type: Record "trm Sales Import Journal Line"

TempSalesTracking_par

Type: Record "trm Temp Integration SaleTrack"

GETCUSTOMERNO()

Returns the Customer No. from the Integration Setup. Raises an error if a problem is encountered.

Syntax

```
[Code[20]] := GetCustomerNo(var SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header")
```

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

Return

Code[20]

GETCUSTOMERNOFROMSETUP()

Syntax

```
[Code[20]] := GetCustomerNoFromSetup(var SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header")
```

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

GETCUSTOMERNOFROMTEMPLATESETUP()

Syntax

```
[Code[20]] := GetCustomerNoFromTemplateSetup(var SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header")
```

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

CREATECUSTOMERFROMTEMPLATE()

Syntax

```
[Code[20]] := CreateCustomerFromTemplate(CustTemplateNo: Code[20], var
```

SalesImportJournalHeader_par: Record "trm Sales Import Jnl Header")

Parameters

CustTemplateNo

Type: Code[20]

SalesImportJournalHeader_par

Type: Record "trm Sales Import Jnl Header"

CREATEINTEGRATIONPARAMS()

Syntax

CreateIntegrationParams(SellToInfoSet_par: Boolean, BillToInfoSet_par: Boolean, ShipToInfoSet_par: Boolean)

Parameters

SellToInfoSet_par

Type: Boolean

BillToInfoSet_par

Type: Boolean

ShipToInfoSet_par

Type: Boolean

IMPORTSALESDOCUMENTS()

Syntax

ImportSalesDocuments(IntegrationSetupCode_par: Code[20], var TempSalesImportJnlHeader_par: Record "trm Sales Import Jnl Header" temporary, var TempSalesImportJnlLine_par: Record "trm Sales Import Journal Line" temporary)

Parameters

IntegrationSetupCode_par

Type: Code[20]

TempSalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

TempSalesImportJnlLine_par

Type: Record "trm Sales Import Journal Line"

SETINTEGRATIONSETUP()

Sets the Integration Setup as a global variable used in this codeunits procedures.

Syntax

SetIntegrationSetup(IntegrationSetupCode_par: Code[20], ForceGetSetup_par: Boolean)

Parameters

IntegrationSetupCode_par

Type: Code[20]

The Integration Setup Code.

ForceGetSetup_par

Type: Boolean

Defines if the Integration Setup should be forced retrieved from the database or not.

PF_ONAFTERIMPORTSALESDOCUMENTS()

Syntax

```
pf_OnAfterImportSalesDocuments(IntegrationSetupCode_par: Code[20], var  
TempSalesImportJnlHeader_par: Record "trm Sales Import Jnl Header" temporary, var  
TempSalesImportJnlLine_par: Record "trm Sales Import Journal Line" temporary)
```

Parameters

IntegrationSetupCode_par

Type: Code[20]

TempSalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

TempSalesImportJnlLine_par

Type: Record "trm Sales Import Journal Line"

ONAFTERGETSHIPMENT()

Syntax

```
OnAfterGetShipment(var TempSalesShipmentHeader_par: Record "Sales Shipment Header"  
temporary, var TempSalesShipmentLine_par: Record "Sales Shipment Line" temporary,  
var TempOrderExtraInfo_par: Record "trm Portal Order Extra Info" temporary)
```

Parameters

TempSalesShipmentHeader_par

Type: Record "Sales Shipment Header"

TempSalesShipmentLine_par

Type: Record "Sales Shipment Line"

TempOrderExtraInfo_par

Type: Record "trm Portal Order Extra Info"

PF_ONAFTERGETINVOICE()

Syntax

```
Pf_OnAfterGetInvoice(var TempSalesInvoiceHeader_par: Record "Sales Invoice Header"  
temporary, var TempSalesInvoiceLine_par: Record "Sales Invoice Line" temporary,  
var TempOrderExtraInfo_par: Record "trm Portal Order Extra Info" temporary)
```

Parameters

TempSalesInvoiceHeader_par

Type: Record "Sales Invoice Header"

TempSalesInvoiceLine_par

Type: Record "Sales Invoice Line"

TempOrderExtraInfo_par

Type: Record "trm Portal Order Extra Info"

PF_ONAFTERGETRETURNRECEIPT()

Syntax

```
Pf_OnAfterGetReturnReceipt(var TempReturnReceiptHeader_par: Record "Return Receipt  
Header" temporary, var TempReturnReceiptLine_par: Record "Return Receipt Line"  
temporary, var TempOrderExtraInfo_par: Record "trm Portal Order Extra Info"  
temporary)
```

Parameters

TempReturnReceiptHeader_par

Type: Record "Return Receipt Header"

TempReturnReceiptLine_par

Type: Record "Return Receipt Line"

TempOrderExtraInfo_par

Type: Record "trm Portal Order Extra Info"

PF_ONAFTERGETCREDITMEMO()

Syntax

Pf_OnAfterGetCreditMemo(var TempSalesCrMemoHeader_par: Record "Sales Cr.Memo Header" temporary, var TempSalesCrMemoLine_par: Record "Sales Cr.Memo Line" temporary, var TempOrderExtraInfo_par: Record "trm Portal Order Extra Info")

Parameters

TempSalesCrMemoHeader_par

Type: Record "Sales Cr.Memo Header"

TempSalesCrMemoLine_par

Type: Record "Sales Cr.Memo Line"

TempOrderExtraInfo_par

Type: Record "trm Portal Order Extra Info"

PF_ONGETCUSTOMERNO()

Syntax

Pf_OnGetCustomerNo(var SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header", var CustomerNo_par: Code[20])

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

CustomerNo_par

Type: Code[20]

PF_ONAFTERGETCUSTNOFROMSETUP()

Syntax

Pf_OnAfterGetCustNoFromSetup(IntegrationSetup_par: Record "trm Integration Setup", var CustomerNo_par: Code[20], var SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header")

Parameters

IntegrationSetup_par

Type: Record "trm Integration Setup"

CustomerNo_par

Type: Code[20]

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

PF_ONAFTERCREATEDOCUMENT()

Syntax

`Pf_OnAfterCreateDocument(var SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header", var SalesHeader_par: Record "Sales Header")`

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

SalesHeader_par

Type: Record "Sales Header"

PF_ONAFTERCREATEORDERFROMQUOTE()

Syntax

`Pf_OnAfterCreateOrderFromQuote(var SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header")`

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

PF_ONAFTERCREATEINVOICEFROMQUOTE()

Syntax

`Pf_OnAfterCreateInvoiceFromQuote(var SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header")`

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

PF_ONAFTERCREATEPICK()

Syntax

`Pf_OnAfterCreatePick(var SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header", var SalesHeader_par: Record "Sales Header")`

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

SalesHeader_par

Type: Record "Sales Header"

PF_ONAFTERAUTORELEASE()

Syntax

`Pf_OnAfterAutoRelease(var SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header", var SalesHeader_par: Record "Sales Header")`

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

SalesHeader_par

Type: Record "Sales Header"

PF_ONAFTERMANUALRELEASE()

Syntax

`Pf_OnAfterManualRelease(var SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header", var SalesHeader_par: Record "Sales Header")`

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

SalesHeader_par

Type: Record "Sales Header"

PF_ONBEFOREREVERSEDOCUMENT()

Syntax

`Pf_OnBeforeReverseDocument(var SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header", NewDocumentType_par: Enum "Sales Document Type", DocumentAmount_par: Decimal, var TempSalesImportJnlHeader_par: Record "trm Sales Import Jnl Header" temporary, var TempSalesImportJnlLine_par: Record "trm Sales Import Journal Line" temporary, var IsHandled_loc: Boolean)`

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

NewDocumentType_par

Type: Enum "Sales Document Type"

DocumentAmount_par

Type: Decimal

TempSalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

TempSalesImportJnlLine_par

Type: Record "trm Sales Import Journal Line"

IsHandled_loc

Type: Boolean

PF_ONAFTERREVERSEDOCUMENT()

Syntax

`Pf_OnAfterReverseDocument(var SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header", NewDocumentType_par: Enum "Sales Document Type", DocumentAmount_par: Decimal, var TempSalesImportJnlHeader_par: Record "trm Sales Import Jnl Header" temporary, var TempSalesImportJnlLine_par: Record "trm Sales Import Journal Line" temporary, IsHandled_loc: Boolean)`

Parameters

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

NewDocumentType_par

Type: Enum "Sales Document Type"

DocumentAmount_par

Type: Decimal

TempSalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

TempSalesImportJnlLine_par

Type: Record "trm Sales Import Journal Line"

IsHandled_loc

Type: Boolean

PF_ONBEFORECREATECUSTOMER()

Syntax

`Pf_OnBeforeCreateCustomer(IntegrationSetup_par: Record "trm Integration Setup", CustTemplateNo_par: Code[20], var SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header", var Customer_par: Record Customer, var Handled_loc: Boolean)`

Parameters

IntegrationSetup_par

Type: Record "trm Integration Setup"

CustTemplateNo_par

Type: Code[20]

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

Customer_par

Type: Record Customer

Handled_loc

Type: Boolean

PF_ONAFTERCREATECUSTOMER()

Syntax

`Pf_OnAfterCreateCustomer(IntegrationSetup_par: Record "trm Integration Setup", CustTemplateNo_par: Code[20], var SalesImportJnlHeader_par: Record "trm Sales Import Jnl Header", var Customer_par: Record Customer, Handled_loc: Boolean)`

Parameters

IntegrationSetup_par

Type: Record "trm Integration Setup"

CustTemplateNo_par

Type: Code[20]

SalesImportJnlHeader_par

Type: Record "trm Sales Import Jnl Header"

Customer_par

Type: Record Customer

Handled_loc

Type: Boolean